

ST Panther 56 K33



Technical Specifications		المواصفات الفنية	
Model	ST PANTHER 56 K33	ST PANTHER 56 K33	الموديل
Code	F00386F0A	F00386F0A	الكود
Meter Model	K33	K33	موديل العداد
Voltage	230 V - 50 Hz	٢٣٠ فولت - ٥٠ هرتز	تيار التشغيل
Inlet	1"	١ بوصة	قطر الدخول
Flow rate up to	52 l/min	٥٢ لتر / دقيقة	معدل التصريف يصل إلى
Max. flow rate	58 l/min	٥٨ لتر / دقيقة	أقصى تصريف للطلبة
Power Watt	600 W	٦٠٠ وات	قدرة الموتور
Weight	16 kg	١٦ كجم	الوزن
Dimensions	357x357x275 mm	٣٥٧ × ٣٥٧ × ٢٧٥ مم	الأبعاد
Accessories		المستملات	
- Suction hose: 4 m - Delivery hose: 6 m. - Gun Type: Automatic. - The machine is equipped with a water separator filter and impurities. - Meter Type: Mechanical (3 column). - non-return valve - filtered impurities filter. - Metal gun seat included.		- خرطوم السحب: ٤ متر - خرطوم الطرد: ٦ متر. - نوع المسدس: اتوماتيك. - الماكينة مزودة بفيلتر فاصل مياه وشوائب. - نوع العداد: ميكانيكي (٣ خانة). - بلف عدم رجوع - فلتر شوائب مصفى. - مقعد مسدس معدني مدرج.	
Other Specifications		مواصفات أخرى	
- The pump contains a filter when entering the order to protect the parts of the pump and the meter. - The machine equipped with a metal chassis with holes for wall mounting. - A gun with a mobile link (Swivel). - The machine contains built-in bypass. - Chassis with a gun seat for protection when not in use. - The machine operates with a rubber ON/OFF switch. - The error rate for reading the meter (+/- 1%) may or may not happen. - The meter contains 3 columns for the current reading and 6 columns for the total reading. - Level of protection on the pump (IP55).		- الطلبة تحتوي على فلتر مصفى عند دخول الطلبة لحماية اجزاء الطلبة والعداد. - الماكينة محملة على شاسيه معدن ذات فتحات للتركيب والتوصيل على الحائط. - مسدس ذات وصله متحركة (سويفل). - الماكينة تحتوي على باب باب داخل. - شاسيه ذات مقعد للمسدس للحماية في حالة عدم الاستخدام. - الماكينة تعمل بمفتاح فتح وغلق ذات غلاف كاوتش. - نسبة الخطأ في قراءة العداد (+/- 1%) قد تحدث او لا تحدث. - العداد يحتوي على (٣) خانات للقراءة الحالية و (٦) خانات للقراءة الاجمالية. - مستوى الحماية على الطلبة (IP55).	



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

ST WITH METER AND FILTER

FEATURES

- READY TO USE
- VERSATILE
- EASY TO INSTALL
- COMPACT DESIGN
- FILTRATION GUARANTEED
- AVAILABLE WITH DIFFERENT PUMPS

PIUSI ST WITH METER AND FILTER is a range of dispensers particularly suited for all applications in which a filtration is required. The stations integrate PIUSI CLEAR or WATER CAPTOR FILTERS and are available with mechanical meter K33 or electronic meter K24/K600 B/3. They come with integrated check valve and 4-meter delivery hose.

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

PERFORMANCE

UP TO

90 L/MIN

FLOW RATE

AC

CONTINUOUS DUTY

POWER

± 1%

ACCURACY

UP TO

6MT

LENGTH

DELIVERY HOSE



ST PANTHER 56, K33,
A60 AND WATER CAPTOR



ST PANTHER 56, K33,
A60 AND CLEAR CAPTOR

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0386FOA	25	55	58OX38OX32O	22,8X15X12,6	1
FO0265FOA	26	57	58OX38OX32O	22,8X15X12,6	1
FO0395FOA	32	71	545X435X34O	21,5X17,1X13,4	1
FO0386F6O	22	48	38OX38OX48O	15X15X18,9	1
FO0386R7O	22	48	38OX38OX48O	15X15X18,9	1
FO0265F4O	26	57	58OX38OX32O	22,8X15X12,6	1
FO0265S8O	26	57	58OX38OX32O	22,8X15X12,6	1
FO0395F6O	32	71	545X435X34O	21,5X17,1X13,4	1
FO0265S2O	18	40	48OX37OX26O	18,9X14,6X10,2	1
FO0265R7O	18	40	48OX37OX26O	18,9X14,6X10,2	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

AVAILABLE WITH DIFFERENT PUMPS AND METERS



AC PUMP - PANTHER 56/72



AC PUMP - E120



AUTOMATIC NOZZLE



MECHANICAL METER - K33





ELECTRONIC METER - K24



K600 B/3

DIMENSIONS

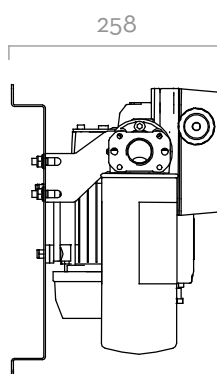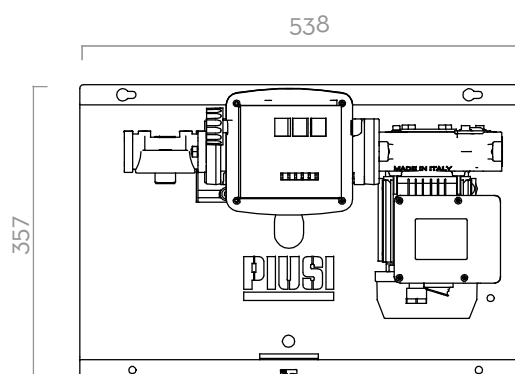

Dimensions expressed in millimeters

IN THE BOX

- ST WITH METER AND FILTER
- METER
- FILTER
- DELIVERY HOSE
- NOZZLE
- NOZZLE HOLDER
- INSTRUCTION MANUAL

DETAILS



WATER CAPTOR FILTER (pag. 170)



MAN. / AUTOM. NOZZLE



K24 / K600 B/3 METER



K33 METER

COMPONENTS

- **PUMPS:**
PANTHER AC PAG. 102
E80/E120 PAG. 106
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 158
- **METER:**
K33 PAG. 146
K24 PAG. 132
K600 B/3 PAG. 136
- **FILTER**
WATER CAPTOR PAG. 170

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			METER	NOZZLE	FILTER	DELIVERY HOSE		SUCTION HOSE		INLET
			L/MIN	GPM	AC V/HZ	DC VOLT	POWER WATT	AMP. MAX.			TYPE	LENGTH	Ø	LENGTH	BSP
FOO386FOA	ST PANTHER 56 FILTER + A60	D	52	14	230/50	350	3		K33	A60	YES	6M	3/4"	4M	1"
FOO265FOA	ST PANTHER 72 FILTER + A60	D	70	18	230/50	500	4,2		K33	A60	YES	6M	3/4"	4M	1"
FOO395FOA	ST E120 FILTER + A120	D	85	22	230/50	1150	5,7		K33	A120	YES	6M	1"	4M	1"
FOO386F60	ST PANTHER 56 FILTER + A60	D	52	14	230/50	350	3		K33	A60	YES	6M	3/4"	-	-
FOO386R70	ST PANTHER 56 + CLEAR CAPTOR + A60	D	52	14	230/50	350	3		K33	A60	YES	6M	3/4"	-	-
FOO265F40	ST PANTHER 72 FILTER + A60	D	70	18	230/50	500	4,2		K33	A60	YES	6M	3/4"	-	-
FOO265S80	ST PANTHER 72 K600 B/F/6T/PA60	D	70	18	230/50	500	4,2		K600 B/3	A60	YES	6M	1"	-	-
FOO395F60	ST E 120 FILTER + A120	D	85	22	230/50	1150	5,7		K33	A120	YES	6M	1"	-	-
FOO265S20	ST PANTHER 72 FILTER + K24 METER	D	70	18	230/50	500	4,2		K24	A80	YES	6M	3/4"	-	-
FOO265R70	ST PANTHER 72 + CLEAR CAPTOR + A80	D	70	18	230/50	500	4,2		K24	A80	YES	6M	1"	-	-

ST WITH METER AND FILTER