

ST Panther 56 + clear captor + A60



Technical Specifications

Model	ST PANTHER 56 + CLEAR CAPTOR + A60
Code	F00386R70
Manufacturing	ITALY
Voltage	220 V - 50 Hz
FLOW-RATE	52 l/m
Power Watt	350 W
Nozzle type	Automatic A60
Filter type	Clear Captor
Pump type	Panther 56
Meter type	Mechanical meter K33
Weight	22 kg
Dimensions	380 x 380 x 480 mm

المواصفات الفنية

الموديل	ST PANTHER 56 + CLEAR CAPTOR + A60
الكود	F00386R70
بلد الصنع والتجميع	ايطاليا
تيار التشغيل	٢٢٠ فولت - ٥٠ هرتز
معدل التصريف	٥٢ لتر / دقيقة
قدرة الموتور	٣٥٠ وات
نوع المسدس	أوماتيك A60
نوع الفلتر	فلتر شفاف فاصل مياه
نوع الطلمبة	Panther 56
نوع العداد	عداد ميكانيكي ٣ خانة K33
الوزن	٢٢ كجم
الأبعاد	٣٨٠ × ٣٨٠ × ٤٨٠ مم

Accessories

- ONLY Delivery hose: 6m.
- Non-return valve – filtered impurities filter.
- Metal nozzle seat included.

المشمات

- خرطوم طرد فقط بطول ٦ متر.
- بلف عدم رجوع – فلتر شوائب مصفاة.
- مقعد مسدس معدني مدرج.

Other Specifications

- The pump contains a filter when entering the order to protect the parts of the pump and the meter.
- The machine equipped with a metal chassis with holes for wall mounting.
- A nozzle with a mobile link (Swivel).
- The machine contains built-in bypass.
- Chassis with a nozzle seat for protection when not in use.
- The machine operates with a rubber ON/OFF switch.
- The Error rate for reading the meter (+/-1%) may or may not happen.
- The meter contains 3 digits for the current reading and 6 digits for the total reading.
- Level of protection on the pump (IP55).

مواصفات أخرى

- الطلمبة تحتوي على فلتر مصفاة عند دخول الطلمبة لحماية أجزاء الطلمبة والعداد.
- الماكينة محملة على شاسيه معدن ذات فتحات للتركيب والتوصيل على الحائط.
- مسدس بوصلة متحركة (سويفل).
- الماكينة تحتوي على باي باص داخلي.
- شاسيه بمقعد للمسدس للحماية في حالة عدم الاستخدام.
- الماكينة تعمل بمفتاح فتح وغلق بغلاف كاوتش.
- نسبة الخطأ في قراءة العداد (+/-1%) قد تحدث أو لا تحدث.
- العداد يحتوي على (٣) خانة للقراءة الحالية و (٦) خانة للقراءة الإجمالية.
- مستوى الحماية على الطلمبة (IP55).



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

ST WITH METER AND FILTER

FEATURES

- READY TO USE
- VERSATILE
- EASY TO INSTALL
- COMPACT DESIGN
- FILTRATION GUARANTEED
- AVAILABLE WITH DIFFERENT PUMPS

PERFORMANCE

UP TO
90 L/MIN

FLOW RATE

AC
CONTINUOUS DUTY

POWER

± 1%

ACCURACY

UP TO
6MT
LENGTH

DELIVERY HOSE

PIUSI ST WITH METER AND FILTER is a range of dispensers particularly suited for all applications in which a filtration is required. The stations integrate PIUSI CLEAR or WATER CAPTOR FILTERS and are available with mechanical meter K33 or electronic meter K24/K600 B/3. They come with integrated check valve and 4-meter delivery hose.



**ST PANTHER 56, K33,
A60 E WATER CAPTOR**

**ST PANTHER 56, K33,
A60 E CLEAR CAPTOR**



**ST PANTHER 72 BIO, K33 BIO,
A70 BIO AND FILTER BIODIESEL**

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO386FOA	25	55	580X380X320	22,8X15X12,6	1
FOO265FOA	26	57	580X380X320	22,8X15X12,6	1
FOO395FOA	32	71	545X435X340	21,5X17,1X13,4	1
FOO386F60	22	48	380X380X480	15X15X18,9	1
FOO386R70	22	48	380X380X480	15X15X18,9	1
FOO265F40	26	57	580X380X320	22,8X15X12,6	1
FOO265S80	26	57	580X380X320	22,8X15X12,6	1
FOO395F60	32	71	545X435X340	21,5X17,1X13,4	1
FOO265S20	18	40	480X370X260	18,9X14,6X10,2	1
FOO265R70	18	40	480X370X260	18,9X14,6X10,2	1
FOO395B00	29	63	560X450X370	22X17X14,5	1
FOO265B00	21	46	580X400X340	22,8X15,7X13,3	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

AVAILABLE WITH DIFFERENT PUMPS AND METERS



AC PUMP - PANTHER 56/72



AC PUMP - E120



AUTOMATIC NOZZLE



MECHANICAL METER - K33





ELECTRONIC METER - K24



K600 B/3

DIMENSIONS

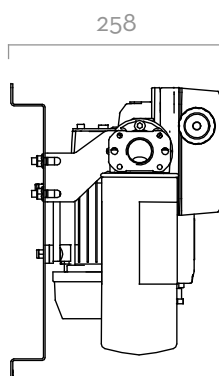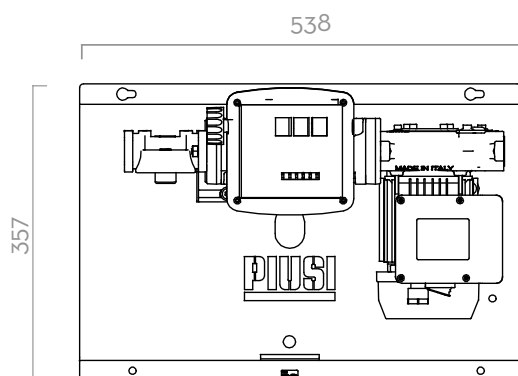

Dimensions expressed in millimeters

IN THE BOX

- ST WITH METER AND FILTER
- METER
- FILTER
- DELIVERY HOSE
- NOZZLE
- NOZZLE HOLDER
- INSTRUCTION MANUAL

DETAILS



WATER CAPTOR FILTER



MAN. / AUTOM. NOZZLE



K24 / K600 B/3 METER



K33 METER

COMPONENTS

- PUMPS:
PANTHER AC
E80/E120
- NOZZLE:
AUTOMATIC NOZZLE
- METER:
K33
K24
K600 B/3
- FILTER
WATER CAPTOR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			METER	NOZZLE	FILTER		DELIVERY HOSE		SUCTION HOSE		INLET
			L/MIN	GPM	AC V/HZ	POWER. WATT	AMP. MAX.			H2O FILTER	BIO-DIESEL	LENGHT	Ø	LENGHT	BSP	
FOO386FOA	ST PANTHER 56 FILTER + A60	D	52	14	230/50	350	3	K33	A60	YES	NO	6M	3/4"	4M	1"	
FOO265FOA	ST PANTHER 72 FILTER + A60	D	70	18	230/50	500	4,2	K33	A60	YES	NO	6M	3/4"	4M	1"	
FOO395FOA	ST E120 FILTER + A120	D	85	22	230/50	1150	5,7	K33	A120	YES	NO	6M	1"	4M	1"	
FOO386F60	ST PANTHER 56 FILTER + A60	D	52	14	230/50	350	3	K33	A60	YES	NO	6M	3/4"	-	-	
FOO386R70	ST PANTHER 56 + CLEAR CAPTOR + A60	D	52	14	230/50	350	3	K33	A60	YES	NO	6M	3/4"	-	-	
FOO265F40	ST PANTHER 72 FILTER + A60	D	70	18	230/50	500	4,2	K33	A60	YES	NO	6M	3/4"	-	-	
FOO265S80	ST PANTHER 72 K600 B/F/6T/PA60	D	70	18	230/50	500	4,2	K600 B/3	A60	YES	NO	6M	1"	-	-	
FOO395F60	ST E 120 FILTER + A120	D	85	22	230/50	1150	5,7	K33	A120	YES	NO	6M	1"	-	-	
FOO265S20	ST PANTHER 72 FILTER + K24 METER	D	70	18	230/50	500	4,2	K24	A80	YES	NO	6M	3/4"	-	-	
FOO265R70	ST PANTHER 72 + CLEAR CAPTOR + A80	D	70	18	230/50	500	4,2	K24	A80	YES	NO	6M	1"	-	-	
FOO395B00	ST E120 K150/F/6MT/PA120 B100	D	85	22	230/50	1150	5,7	K150 BIO	A120 BIO	NO	YES	6M	1"	-	-	
FOO265B00	ST PANTHER 72 K33/F/6MT/PA70 B100	D	70	18	230/50	500	4,2	K33 BIO	A70 BIO	NO	YES	6M	3/4"	-	-	