



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION



FLUID
MONITORING

ST WITH METER and FILTER

FEATURES

- **READY TO USE**
- **VERSATILE**
- **EASY TO INSTALL**
- **COMPACT DESIGN**
- **FILTRATION GUARANTEED**
- **AVAILABLE WITH DIFFERENT PUMPS**

PIUSI ST WITH METER AND FILTER is a range of dispensers particularly suited for all applications in which a filtration is required. The stations integrate PIUSI clear or water captor filters and are available with mechanical meter K33/K44 or electronic meter K24. They come with integrated check valve and 4-meter delivery hose.

PERFORMANCE

UP TO
90 L/MIN

FLOW-RATE

AC
CONTINUOUS DUTY

POWER

± 1%

ACCURACY


8MT
LENGTH

DELIVERY HOSE



NEW

**ST PANTHER 56/72, K33 / K44
A60 AND WATER CAPTOR**

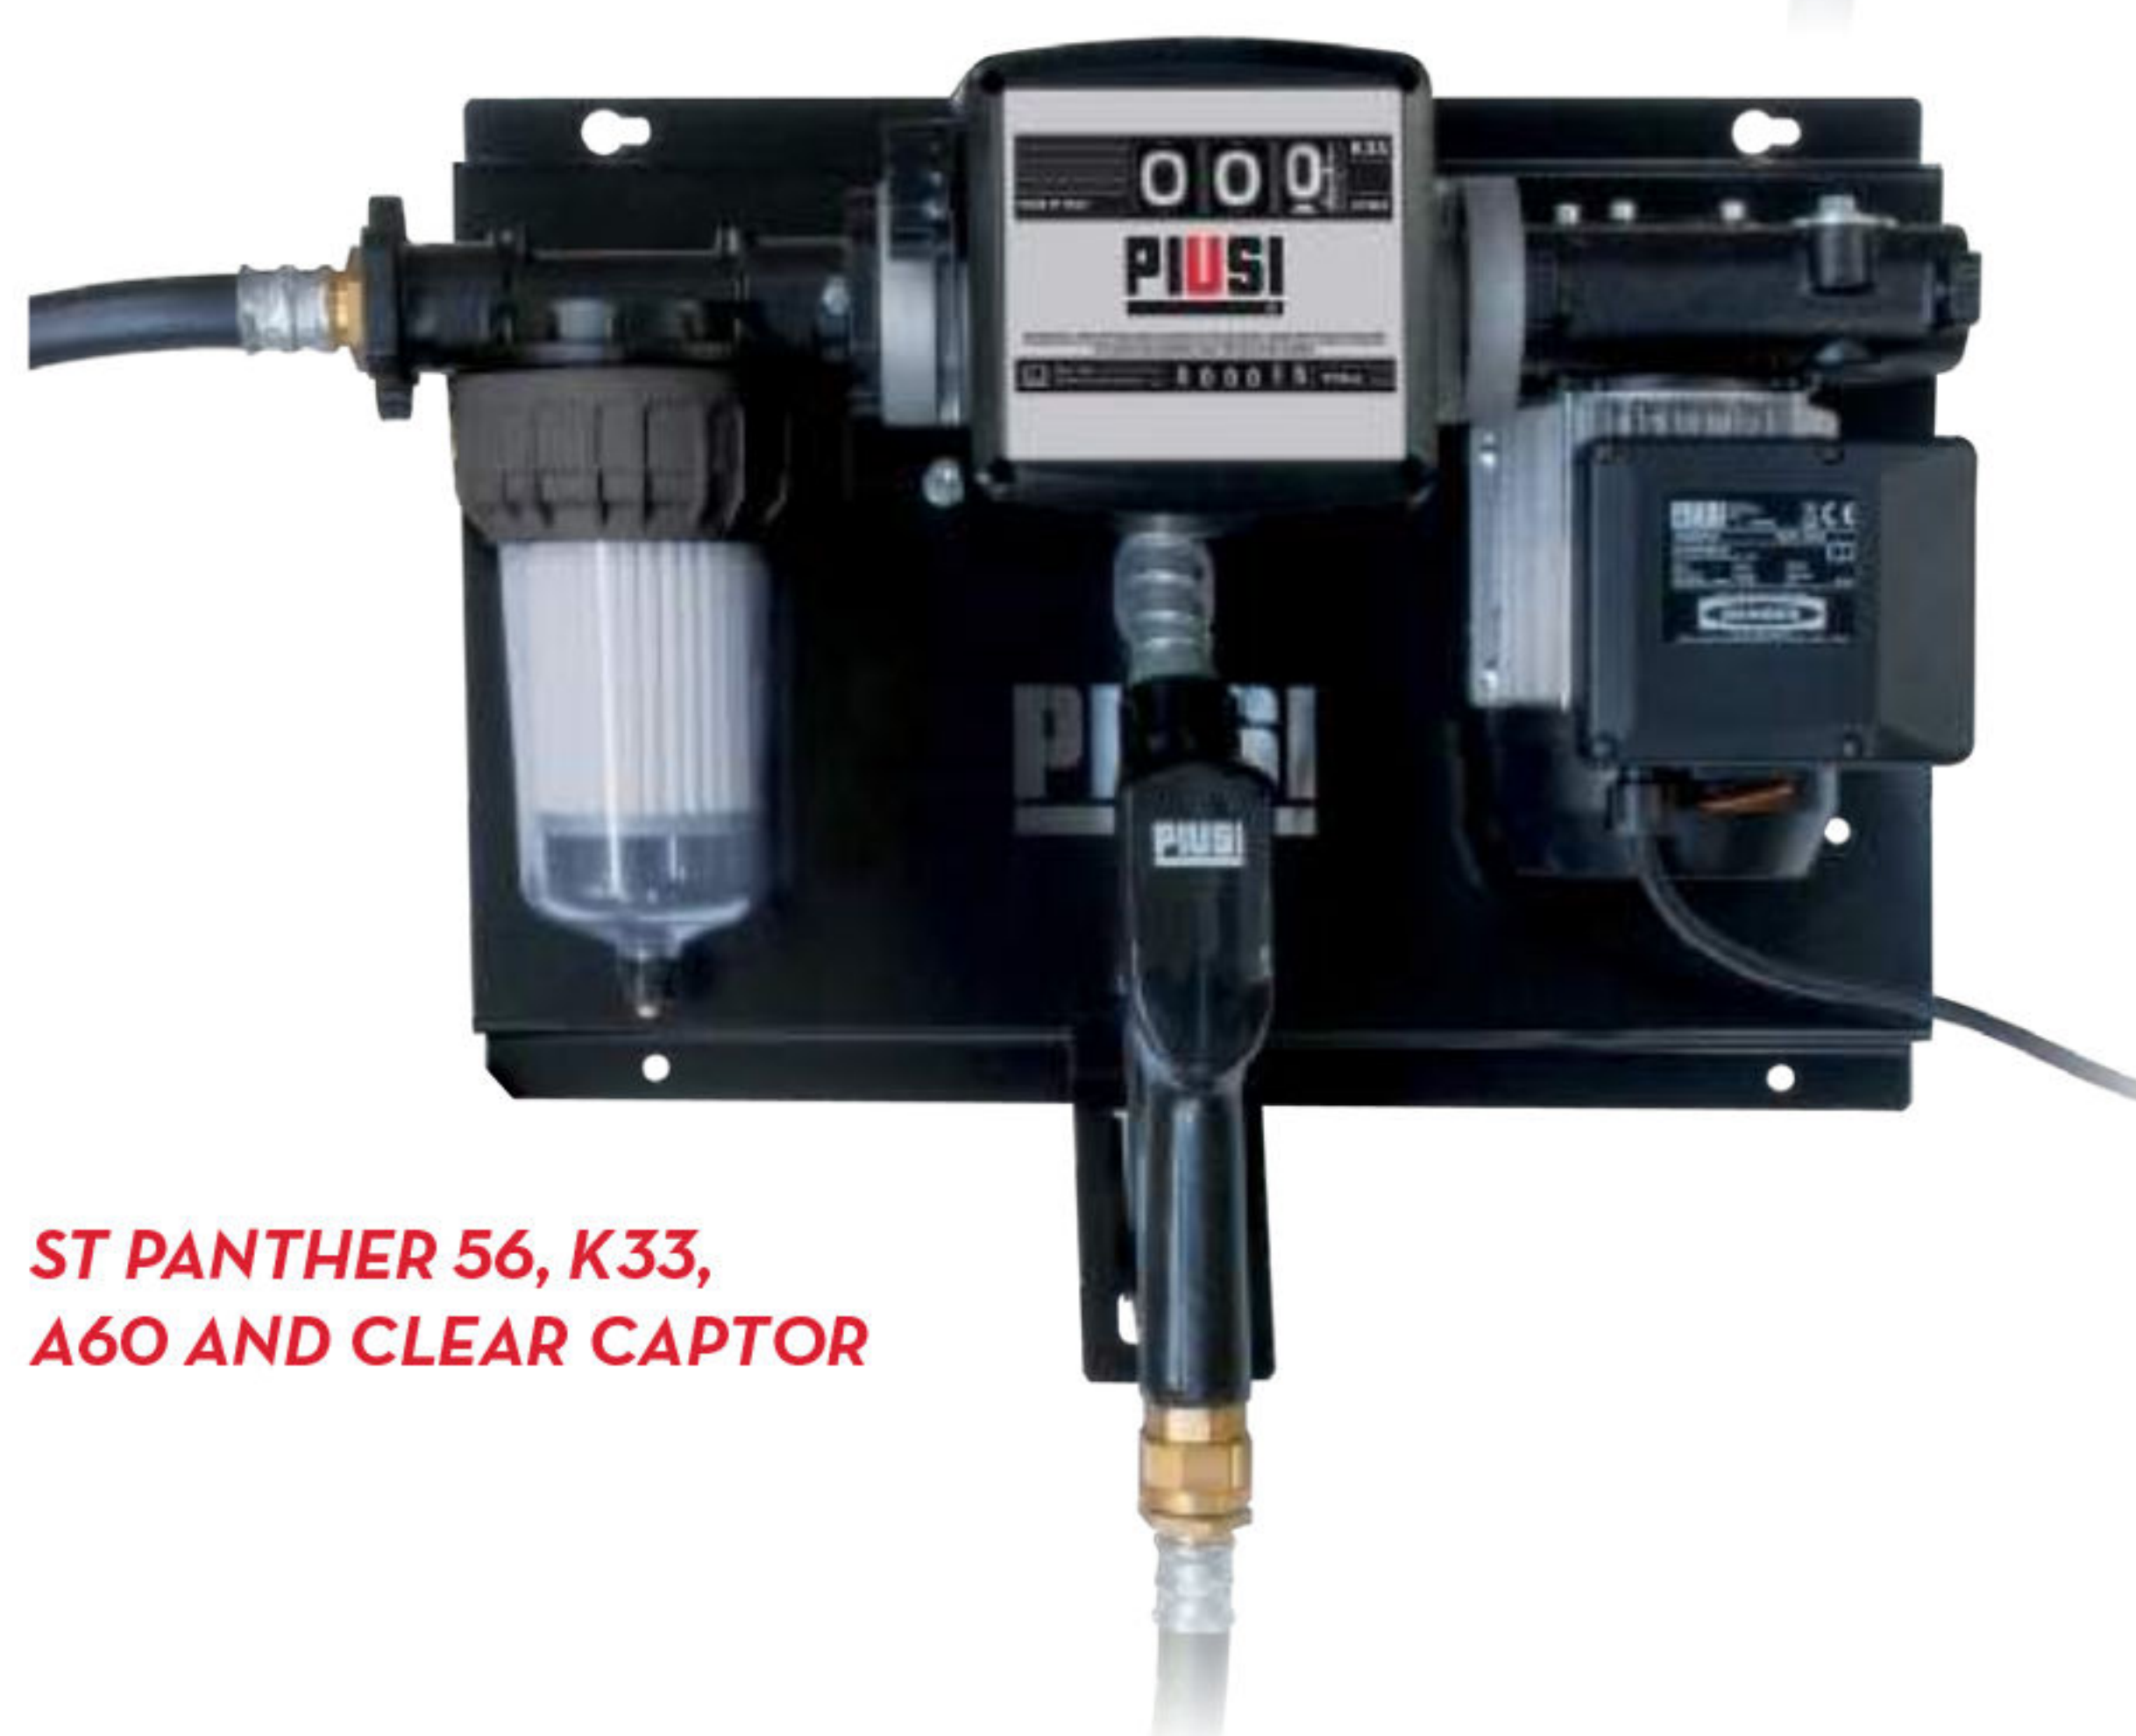

**ST PANTHER 56, K33,
A60 AND CLEAR CAPTOR**

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO386FOA	25	55	580X380X320	22,8X15X12,6	1
FOO265F3A	25	55	580X380X320	22,8X15X12,6	1
FOO386S50	26	57	580X380X320	22,8X15X12,6	1
FOO395FOA	32	71	545X435X340	21,5X17,1X13,4	1
FOO386F60	22	48	380X380X480	15X15X18,9	1
IFOO386R70	22	48	380X380X480	15X15X18,9	1
FOO265F40	26	57	580X380X320	22,8X15X12,6	1
FOO265S80	26	57	580X380X320	22,8X15X12,6	1
FOO395F60	32	71	545X435X340	21,5X17,1X13,4	1
FOO265S20	18	40	480X370X260	18,9X14,6X10,2	1
FOO265R70	18	40	480X370X260	18,9X14,6X10,2	1



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

DIFFERENT CONFIGURATIONS



AC PUMP - PANTHER 56/72



AC PUMP - E120



AUTOMATIC NOZZLE



MECHANICAL METER - K33



ELECTRONIC METER - K24



K600 B/3

IN THE BOX

- ST UNIT
- METER
- FILTER
- DELIVERY HOSE
- NOZZLE
- NOZZLE HOLDER
- INSTRUCTION MANUAL

DETAILS



WATER CAPTOR FILTER (pag. 128)



MAN. / AUTOM. NOZZLE




K44 / K33 METER



K24 METER

DIMENSIONS

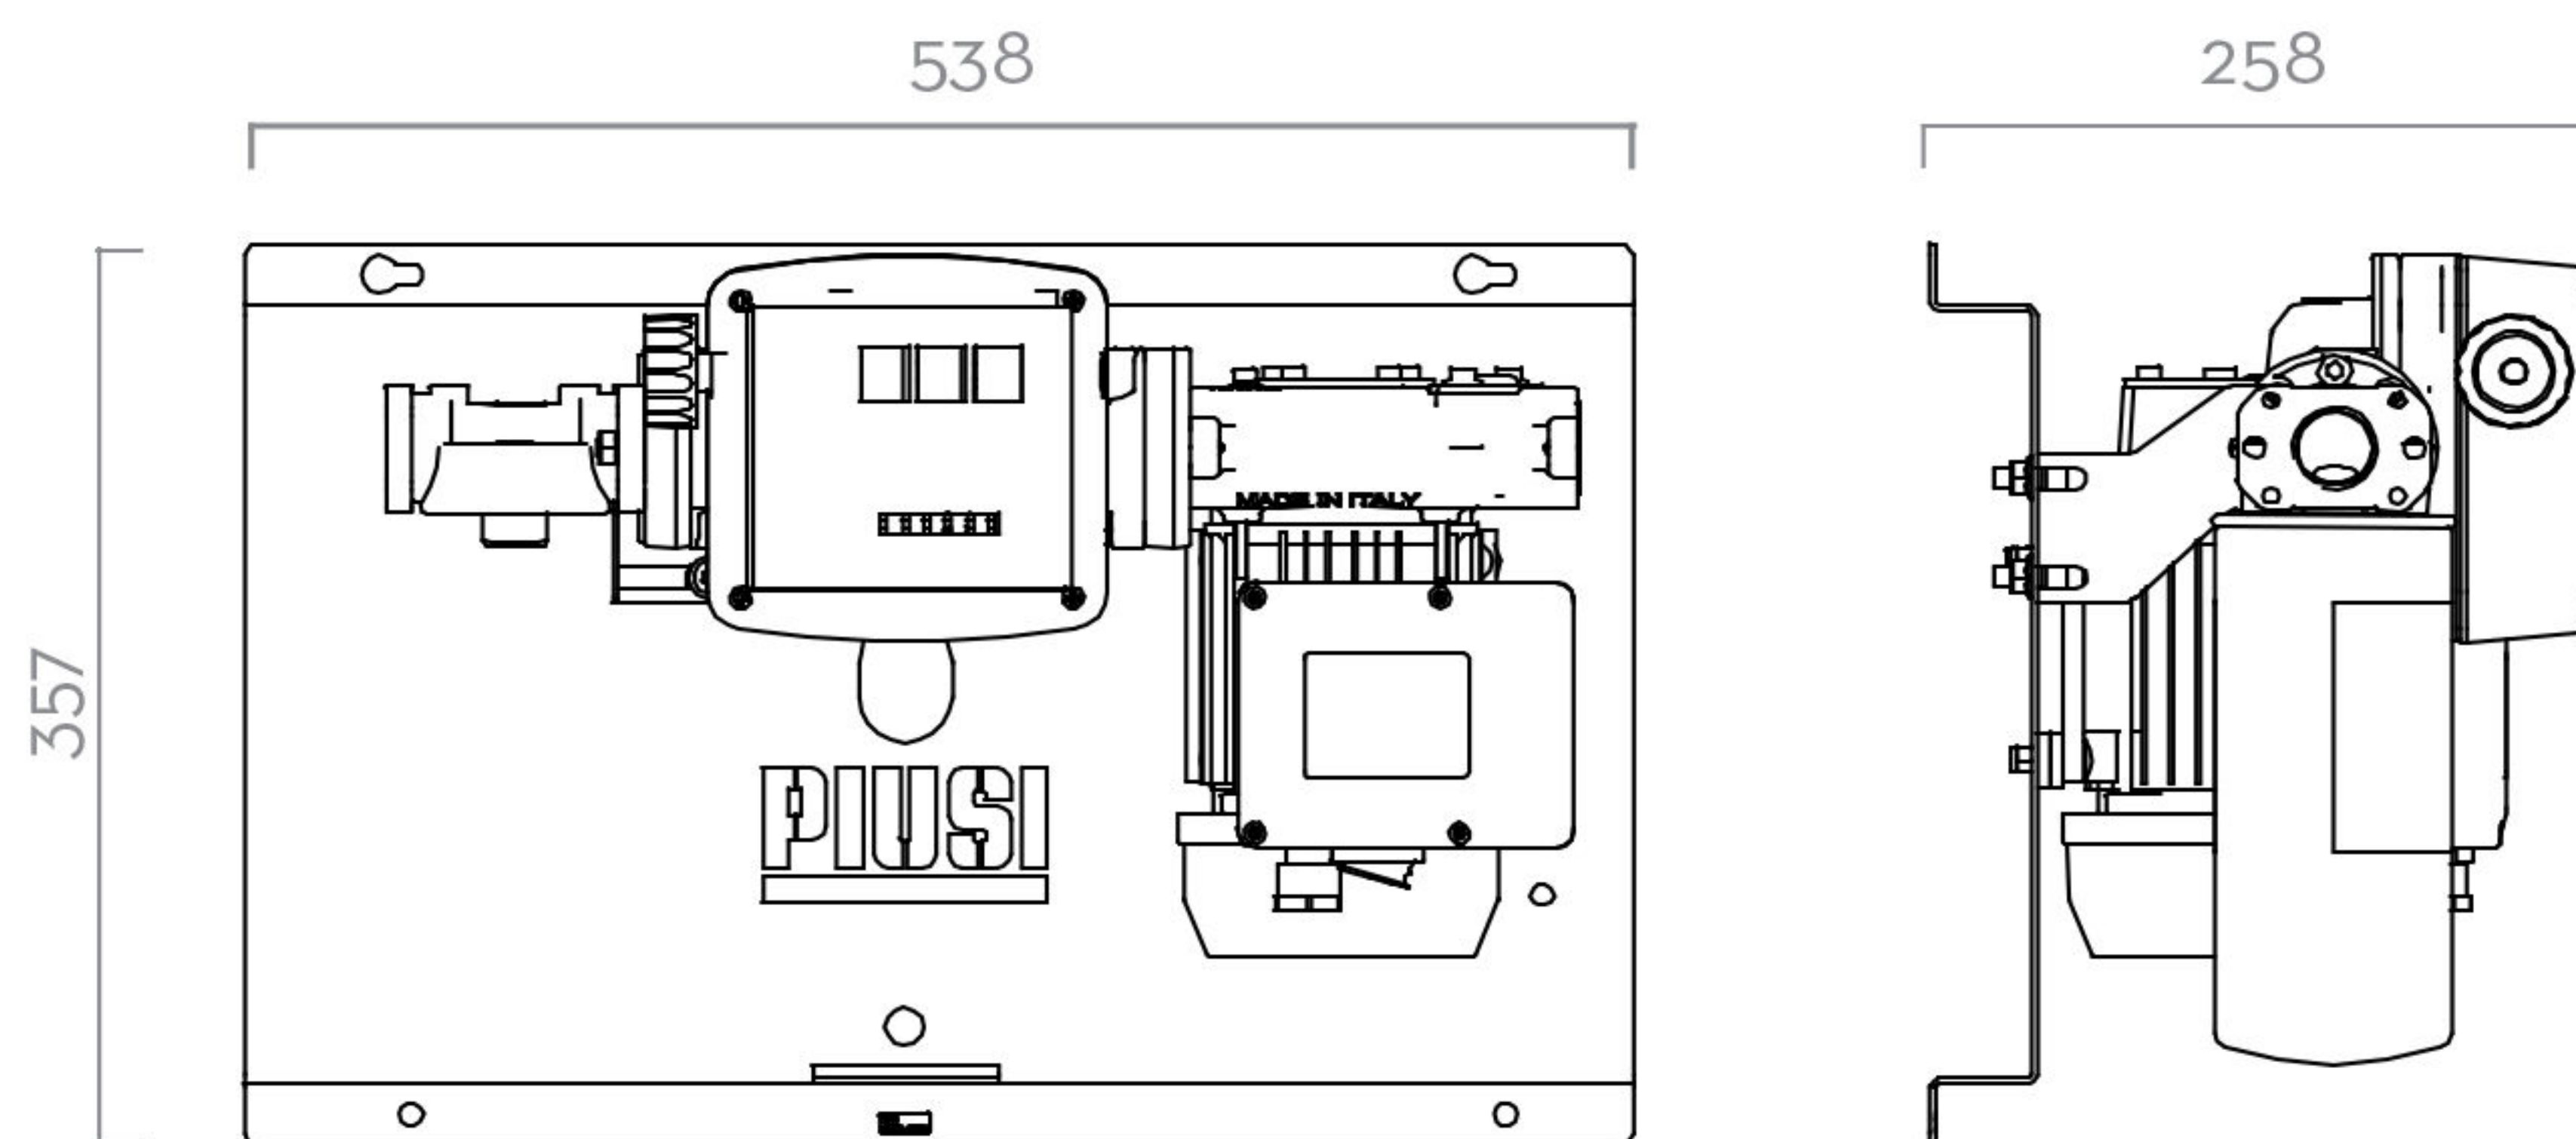

Dimensions expressed in millimeters

COMPONENTS

- **PUMP:**
 - PANTHER AC PAG. 64
 - E80/E120 PAG. 68
- **NOZZLE:**
 - AUTOMATIC NOZZLE PAG. 118
- **METER:**
 - K33 PAG. 108
 - K44 PAG. 108
 - K24 PAG. 94
 - K600 B/3 PAG. 98
- **FILTER**
 - WATER CAPTOR PAG. 128

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			METER	NOZZLE	FILTER	DELIVERY HOSE		SUCTION HOSE		INLET
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.				LENGTH	Ø	LENGTH	BSP	
FOO386FOA	ST PANTHER 56 FILTER + A6O	D	52	14	230/50	350	3	K33	AUT.	YES	6M	3/4"	4M	1"	
FOO265F3A	ST PANTHER 72 + CLEAR CAPTOR + A6O	D	70	14	230/50	500	4,2	K33	AUT.	YES	6M	3/4"	4M	1"	
FOO386S5O	ST PANTHER 72 FILTER + A6O	D	70	18	230/50	500	4,2	K44	AUT.	YES	8M	3/4"	4M	1"	
FOO395FOA	ST E120 FILTER + A12O	D	85	22	230/50	1150	5,7	K33	AUT.	YES	6M	1"	4M	1"	
FOO386F6O	ST PANTHER 56 FILTER + A6O	D	52	14	230/50	350	3	K33	AUT.	YES	6M	3/4"	6M	1"	
FOO386R7O	ST PANTHER 56 + CLEAR CAPTOR + A6O	D	52	14	230/50	350	3	K33	AUT.	YES	6M	3/4"	6M	1"	
FOO265F4O	ST PANTHER 72 FILTER + A6O	D	70	18	230/50	500	4,2	K33	AUT.	YES	6M	3/4"	6M	1"	
FOO265S8O	ST PANTHER 72 K600 B/F/6T/PA6O	D	70	18	230/50	500	4,2	K600 B/3	AUT.	YES	6M	1"	-	1"	
FOO395F6O	ST E 120 FILTER + A12O	D	85	22	230/50	1150	5,7	K33	AUT.	YES	6M	1"	6M	1"	
FOO265S2O	ST PANTHER 72 FILTER + K24 METER	D	70	18	230/50	500	4,2	K24	AUT.	YES	6M	3/4"	6M	1"	
FOO265R7O	ST PANTHER 72 + CLEAR CAPTOR + A8O	D	70	18	230/50	500	4,2	K24	AUT.	YES	6M	1"	6M	1"	

ST WITH METER AND FILTER