

C DISPENSERS CUBE 90



Technical Specifications

Model	CUBE 90
Code	F00592000
Meter Model	K44
Pump Model	Panth 90
Voltage	230 V - 50 Hz
Inlet	1"
Flow rate	90 l/min
Power Watt	700 W
Weight	21 kg
Dimensions	400 x 400 x 460 mm

Accessories

- Gun Type: Automatic.
- Delivery hose 4m - Automatic nozzle with swivel connection.
- Integrated nozzle holder.

Other Specifications

- Self-priming vane pump fitted with bypass, installed on anti-vibration supports. Induction 700W motor fitted with thermal motor overload protection.
- Mechanical meter contains 4 columns for the current reading and 8 columns for the total reading unchangeable.
- Accuracy: +/- 1% may happen or not.
- Include Intake mesh filter.
- Integrated nozzle holder with stop/start pump lever.
- IP55 protection.
- Noise level below 75 dB.
- Fully closed machine with a metal chassis.

المواصفات الفنية

Model	CUBE 90
Code	F00592000
Meter Model	K44
Pump Model	Panth 90
Voltage	٢٣٠ فولت - ٥٠ هرتز
Inlet	١ بوصة
Flow rate	٩٠ لتر / دقيقة
Power Watt	٧٠٠ واط
Weight	٢١ كجم
Dimensions	٤٠٠ x ٤٠٠ x ٤٦٠ مم

المستملات

- نوع المسدس: أوتوماتيك.
- خرطوم الطرد ٤ متر - وصلة متحركة (سويفل).
- حامل خرطوم معدني.

مواصفات أخرى

- الطلمبة هي طلمبة ذاتية تحضير ذاتي تحتوي علي باي باص داخلي متصلة مباشرة بالماتور مينة ٧٠٠ واط تحتوي علي حساس حراري واوفر لود.
- عداد ميكانيكي (٤) خانات للقراءة الحالية (٨) خانات للقراءة الاجمالية بعمر العداد لا يمكن تغييره.
- نسبة الخطأ في قراءة العداد (+/- ١%) قد تحدث او لا تحدث
- تحتوي علي فلتر مصفى علي دخول الطلمبة.
- حامل مسدس يحتوي علي مفتاح لاييقاف وتشغيل الطلمبة مباشرة عند وضع المسدس علي الحامل.
- مستوى الحماية علي الماكينة (IP55).
- مستوى الضوضاء ٧٥ ديسبل.
- ماكينة مغلقة بالكامل بشاسيه معدني.



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

CUBE

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- STURDY STRUCTURE
- MECHANICAL METER
- INDUCTION THERMAL-PROTECTED MOTOR
- OVERLOAD PROTECTION
- BUILT-IN MESH FILTER
- IP 55

The PIUSI CUBE is a range of mechanical fuel transfer dispenser for non-commercial use, composed of a self-priming vane pump fitted with integrated bypass valve, automatic nozzle with swivel connection and integrated nozzle holder with start/stop pump lever. Its versatility allows different applications: on walls, on tanks, on cisterns, on drums or stand-alone (with the optional pedestal).

PERFORMANCE

UP TO
90 L/MIN

FLOW-RATE

AC/DC

VOLTAGE

POWER

± 1%

ACCURACY

**CUBE 56 WITH FILTER****CUBE 56 WITH PEDESTAL (optional)**

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
00057500C	21	46	400X400X460	-	1	12	24
00057516A	21	46	400X400X460	-	1	12	24
FO059100A	21	46	400X400X460	-	1	12	24
FO059111A	21	46	400X400X460	-	1	12	24
FO057600C	21	46	400X400X460	-	1	12	24
FO057700C	21	46	400X400X460	-	1	12	24
FO0575400	22	46	400X400X460	-	1	12	24
FO0591200	22	48	400X400X460	-	1	12	24
FO0592000	22	46	400X400X460	!	1	12	24



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

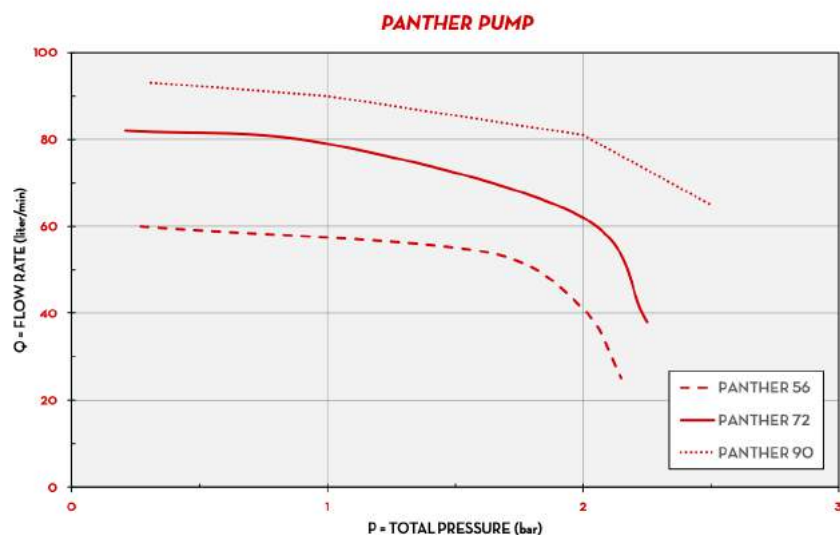

TYPE OF FLUID DIESEL

TEMPERATURE 9-20-6 °C

IN THE BOX

- CUBE DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS




NUTATING DISK METER



K33/K44 (pag. 108)

DIMENSIONS

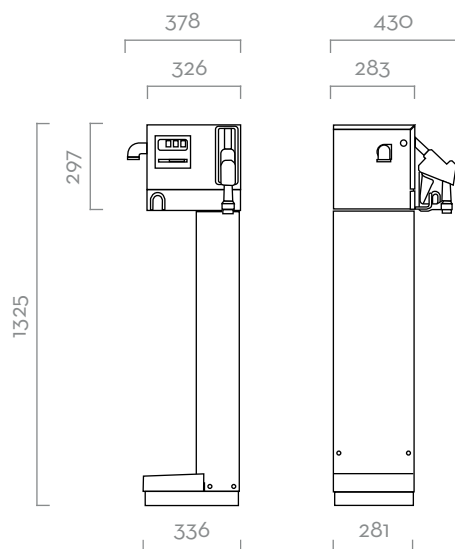

Dimensions expressed in millimeters

COMPONENTS

- **PUMP:**
PANTHER AC PAG. 64
PANTHER DC PAG. 78
- **METER:**
K33 / K44 PAG. 108
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 118

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER		INLET	HOSE	
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE	TYPE	H2O FILTER	FILTERING CAPACITY	BSP	LENGTH	Ø
00057500C	CUBE 56	D	56	15	230/50	350	3	PANTH 56	K33	AUT.	NO	-	1"	4M	3/4"
00057516A	CUBE 56/44 PULSER	D	56	15	230/50	350	3	PANTH 56	K44	AUT.	NO	-	1"	4M	3/4"
FO059100A	CUBE 70/33	D	70	18	230/50	500	4,2	PANTH 72	K33	AUT.	NO	-	1"	4M	1"
FO059111A	CUBE 70/44 PULSER	D	70	18	230/50	500	4,2	PANTH 72	K44	AUT.	NO	-	1"	4M	1"
FO057600C	CUBE 56 DC 12V	D	56	15	12	300	35	PANTH DC	K33	AUT.	NO	-	1"	4M	1"
FO057700C	CUBE 70 DC 24V	D	70	18	24	420	25	PANTH DC	K33	AUT.	NO	-	1"	4M	3/4"
FO057540O	CUBE 56/33 + FILTER	D	56	15	230/50	350	3	PANTH 56	K33	AUT.	YES	30 µ	1"	6M	3/4"
FO059120O	CUBE 70/33 + FILTER	D	70	18	230/50	500	4,2	PANTH 72	K33	AUT.	YES	30 µ	1"	6M	1"
FO059200O	CUBE 90/44	D	90	23,8	230/50	700	4,9	PANTH 90	K44	A120	NO	-	1"	4M	1"

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 50/60 HZ FREQUENCY