

PAC PUMPS Panther 72



تحضير ذاتي / طلمبة زهر / باي باص داخلي / فلتر مصفاة / ريش (تكنوبوليمر) / اوفرلود / حشو (viton)

FEATURES

Vane rotors



Filter



Flange connect.



Technical Specifications

Model	PANTHER 72
Code	000732000
Flow-Rate	72 l/m
AC Volt / Hz	220 V - 50 Hz
Inlet / Outlet	1"
Power Watt	500 W
RPM	2900 rpm
Weight	7,9 kg
Dimension	345 x 175 x 255 mm

المواصفات الفنية

الموديل	PANTHER 72
الكود	000732000
معدل التصريف	٧٢ لتر / دقيقة
تيار التشغيل	٢٢٠ فولت - ٥٠ هرتز
قطر الدخول والخروج	١ بوصة
القدرة	٥٠٠ وات
عدد اللفات	٢٩٠٠ لفة / دقيقة
الوزن	٧,٩ كجم
الأبعاد	٣٤٥ × ١٧٥ × ٢٥٥ مم



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

PANTHER AC

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- COMPACT AND STURDY DESIGN
- READY TO USE
- EASY TO INSTALL
- INTEGRATED FILTER

The PIUSI PANTHER AC is a versatile self-priming rotary electric vane transfer pump available in three versions (56 - 72 - 90) particularly suitable for dispensers, fixed fuel transferring system and other industrial applications. It is equipped with a by-pass valve and an incorporated filter to stop impurities.

PERFORMANCE

UP TO
90 L/MIN

FLOW-RATE

AC
CONTINUOUS DUTY*

POWER



PANTHER 56 (flanged not included)



PANTHER 72 - PANTHER 90 (flanged included)

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
PANTHER 56							
FO0730000	7,4	16,3	345X175X255	-	1	60	84
OO0731000	7,4	16,3	345X175X255	-	1	60	84
OO0733000	7,4	16,3	345X175X255	-	1	60	84
PANTHER 72							
OO0732000	7,9	17,4	345X175X255	1	1	60	84
OO0735000	7,9	17,4	345X175X255	-	1	60	84
PANTHER 90							
FO0733020	8,2	19,9	345X175X255	-	1	60	84



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

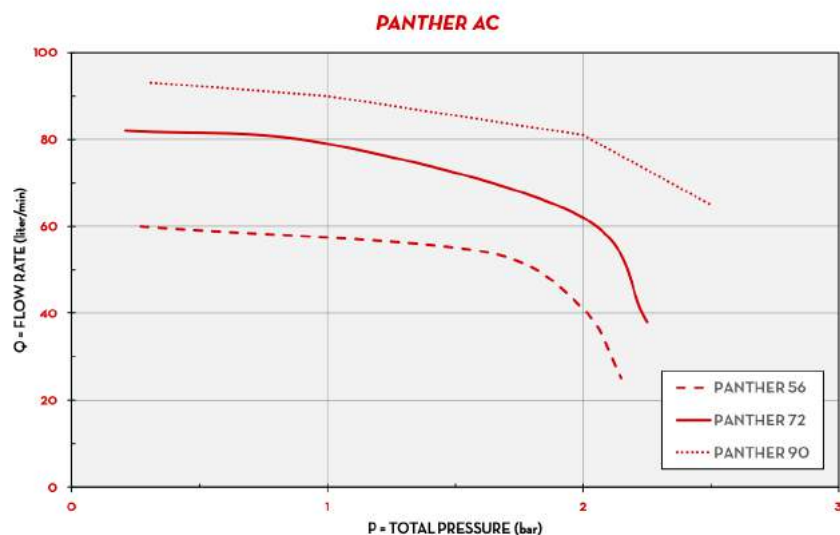

TYPE OF FLUID DIESEL

TEMPERATURE 9-20-6 °C

IN THE BOX

- PANTHER AC PUMP
- INSTRUCTION MANUAL

DETAILS




INTEGRATED FILTER



VANE ROTOR

DIMENSIONS

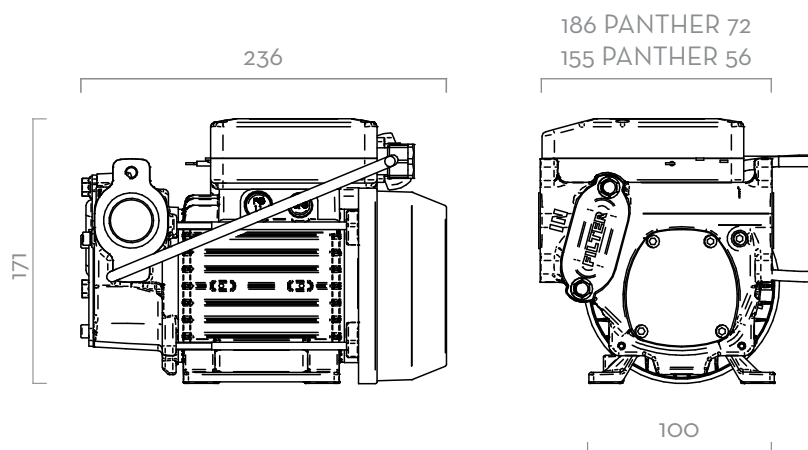

Dimensions expressed in millimeters



PUMP

- MAX 6M (20FT),
- SUCTION HOSE Ø 1" MIN,
- MAX SUCTION HEIGHT:
 - 2M (7FT) W/O NON RETURN VALVE
 - 4M (14FT) W NON RETURN VALVE



TANK

MATERIALS

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VANES: TECHNOPOLYMER
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE				RPM	INLET OUTLET BSP	FLANGE CONNECTION	BYPASS VALVE	INLET FILTER
			L/MIN	GPM	SINGLEPHASE MOTOR V/HZ	THREEPHASE MOTOR V/HZ	POWER WATT	AMP. MAX.					
PANTHER 56													
FO0730000	PANTHER 56 230/50	D	56	15	230/50	-	350	3	2900	1"	-	YES	YES
000731000	PANTHER 56 230/60	D	68	18	230/60	-	500	3,9	3400	1"	-	YES	YES
000733000	PANTHER 56 400/50	D	56	15	-	400/50	500	1,3	2900	1"	-	YES	YES
PANTHER 72													
000732000	PANTHER 72 230/50	D	72	19	230/50	-	500	4,2	2900	1"	YES	YES	YES
000735000	PANTHER 72 400/50	D	72	19	-	400/50	500	1,6	2900	1"	YES	YES	YES
PANTHER 90													
FO07302A	PANTHER 90 230/50	D	90	23,8	230/50	-	700	4,9	2900	1"	YES	YES	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY.
(*) EXCEPT PANTHER 90