

C DISPENSERS UBE 70



Technical Specifications		المواصفات الفنية	
Model	CUBE 70	CUBE 70	الموديل
Code	F0059100A	F0059100A	الكود
Meter Model	K33	K33	موديل العداد
Pump Model	Panth 72	Panth 72	موديل الطلمبة
Voltage	220 V - 50 Hz	٢٢٠ فولت - ٥٠ هرتز	تيار التشغيل
Inlet	1"	١ بوصة	قطر الدخول
Flow rate	70 l/min	٧٠ لتر / دقيقة	معدل التصريف
Power Watt	500 W	٥٠٠ وات	قدرة الموتور
Weight	21 kg	٢١ كجم	الوزن
Dimensions	400x400x460 mm	٤٦٠ × ٤٠٠ × ٤٠٠ مم	الأبعاد
Accessories		المستملات	
- Gun Type: Automatic. - Delivery hose.		- نوع المسدس: أوتوماتيك. - خرطوم الطرد.	
Other Specifications		مواصفات أخرى	
The meter contains 3 columns for the current reading and 6 columns for the total reading.		العداد يحتوي على (٣) خانات للقراءة الحالية و (٦) خانات للقراءة الاجمالية.	



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

CUBE

هذا الكatalog خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- STURDY STRUCTURE
- MECHANICAL METER
- INDUCTION THERMAL-PROTECTED MOTOR
- OVERLOAD PROTECTION
- BUILT-IN MESH FILTER
- IP 55

The PIUSI CUBE is a range of mechanical fuel transfer dispenser for non-commercial use, composed of a self-priming vane pump fitted with integrated bypass valve, automatic nozzle with swivel connection and integrated nozzle holder with start/stop pump lever. Its versatility allows different applications: on walls, on tanks, on cisterns, on drums or stand-alone (with the optional pedestal).

PERFORMANCE

UP TO
90 L/MIN

FLOW-RATE

AC/DC
VOLTAGE
POWER

± 1%

ACCURACY



CUBE 56 WITH FILTER



CUBE 56 WITH PEDESTAL (optional)

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
00057500C	21	46	400X400X460	-	1	12	24
00057516A	21	46	400X400X460	-	1	12	24
FO059100A	21	46	400X400X460	1	1	12	24
FO059111A	21	46	400X400X460	-	1	12	24
FO057600C	21	46	400X400X460	-	1	12	24
FO057700C	21	46	400X400X460	-	1	12	24
FO0575400	22	46	400X400X460	-	1	12	24
FO0591200	22	48	400X400X460	-	1	12	24
FO0592000	22	46	400X400X460	-	1	12	24



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

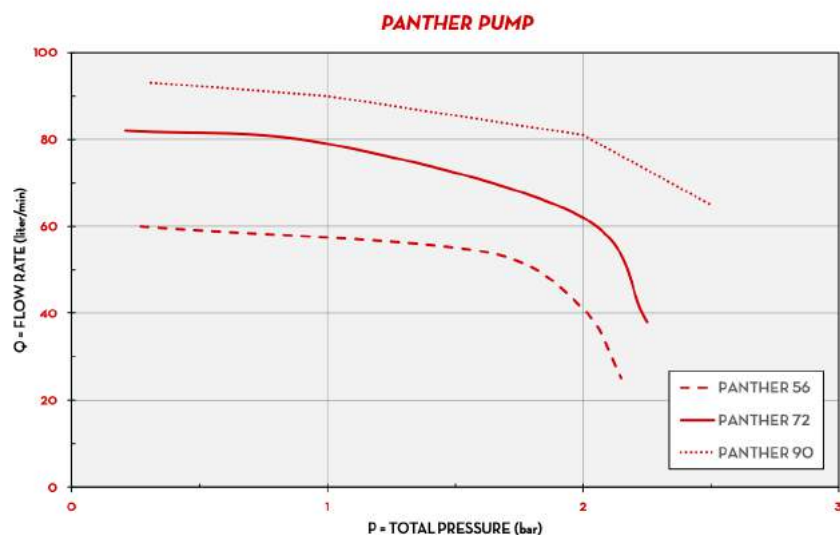

TYPE OF FLUID DIESEL

TEMPERATURE 9-20-6 °C

IN THE BOX

- CUBE DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS




NUTATING DISK METER



K33/K44 (pag. 108)

DIMENSIONS

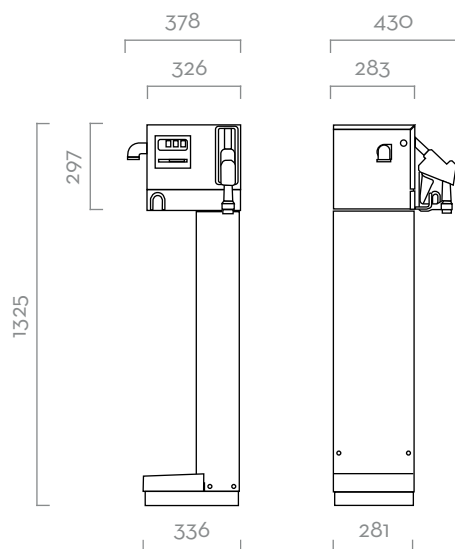

Dimensions expressed in millimeters

COMPONENTS

- **PUMP:**
PANTHER AC PAG. 64
PANTHER DC PAG. 78
- **METER:**
K33 / K44 PAG. 108
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 118

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER		INLET	HOSE	
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE	TYPE	H2O FILTER	FILTERING CAPACITY	BSP	LENGTH	Ø
00057500C	CUBE 56	D	56	15	230/50	350	3	PANTH 56	K33	AUT.	NO	-	1"	4M	3/4"
00057516A	CUBE 56/44 PULSER	D	56	15	230/50	350	3	PANTH 56	K44	AUT.	NO	-	1"	4M	3/4"
FO059100A	CUBE 70/33	D	70	18	230/50	500	4,2	PANTH 72	K33	AUT.	NO	-	1"	4M	1"
FO059111A	CUBE 70/44 PULSER	D	70	18	230/50	500	4,2	PANTH 72	K44	AUT.	NO	-	1"	4M	1"
FO057600C	CUBE 56 DC 12V	D	56	15	12	300	35	PANTH DC	K33	AUT.	NO	-	1"	4M	1"
FO057700C	CUBE 70 DC 24V	D	70	18	24	420	25	PANTH DC	K33	AUT.	NO	-	1"	4M	3/4"
FO0575400	CUBE 56/33 + FILTER	D	56	15	230/50	350	3	PANTH 56	K33	AUT.	YES	30 µ	1"	6M	3/4"
FO0591200	CUBE 70/33 + FILTER	D	70	18	230/50	500	4,2	PANTH 72	K33	AUT.	YES	30 µ	1"	6M	1"
FO0592000	CUBE 90/44	D	90	23,8	230/50	700	4,9	PANTH 90	K44	A120	NO	-	1"	4M	1"

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 50/60 HZ FREQUENCY