

S DISPENSERS SELF SERVICE 100 MC



Technical Specifications

Model	Self-service 100 MC
Code	F0074101C
Meter Model	K600
Pump Model	E 120
Voltage	220 V - 50 Hz
Inlet	1,5"
Flow rate	90 l/min
Power Watt	1150 W
Weight	75 kg
Dimensions	1478 x 488 x 400 mm

المواصفات الفنية

Self-service 100 MC	الموديل
F0074101C	الكود
K600	موديل العداد
E 120	موديل الطلمبة
٢٢٠ فولت - ٥٠ هرتز	تيار التشغيل
١,٥ بوصة	قطر الدخول
٩ لتر / دقيقة	معدل التصريف
١١٥٠ وات	قدرة الموتور
٧٥ كجم	الوزن
١٤٧٨ × ٤٨٨ × ٤٠٠ مم	الأبعاد

Accessories

- Automatic gun.

المستملات

- مسدس اتوماتيك.

Other Specifications

- Digital screen for reading accuracy with a metal cover for protection.
- Control panel with all types of pressure keys required.
- Control the machine with a password.
- Store operations up to 280 operations.
- It is equipped with a filter to purify the diesel from water and a filtered impurity on the entry of the pump.
- The possibility of connecting the machine directly to a computer and full control of the machine for a distance of up to (1) kilometers (on request and at an additional cost).
- The ability to add a magnetic key to each user (by request and at an additional cost)
- The ability to transfer data on a computer without direct communication between the machine and the computer.

مواصفات أخرى

- شاشة ديجيتال لدقة القراءة ذات غطاء معدني للحماية.
- لوحه تحكم بكل انواع المفاتيح الضغط المطلوبة.
- تحكم بالماكينة بكود تشغيل (باسوورد).
- تخزين عمليات الصرف حتى ٢٨٠ عملية .
- مزود بفلتر لتنقية السولار من المياه وفلتر مصفى للشوائب على دخول الطلمبة.
- إمكانية توصيل الماكينة مباشرة بجهاز كمبيوتر والتحكم الكامل بالماكينة لمسافة تصل الى (١) كيلو متر (بالطلب بتكلفه اضافية).
- إمكانية إضافة مفتاح مميغن لكل مستخدم (بالطلب بتكلفة اضافية)
- إمكانية نقل البيانات على جهاز الكمبيوتر بدون تواصل مباشر بين الماكينة وجهاز الكمبيوتر.



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

SELF SERVICE MC

FEATURES

- MULTI-USER MANAGEMENT
- WATER CAPTOR FILTER
- ALL-IN-ONE EQUIPMENT
- COMPACT DESIGN
- COMPATIBLE WITH SSM 2018 SOFTWARE
- IP55

The PIUSI SELF SERVICE MC is a complete device suitable to fit all diesel-dispensing needs. With its sturdy structure, this dispenser is equipped with a high capacity vane pump, built-in bypass, automatic nozzle, water captor filter and electronic panel able to manage up to 80 users and 255 transactions.

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

PERFORMANCE

UP TO

90 L/MIN

FLOW-RATE

AC

CONTINUOUS DUTY

POWER

± 0,5%

ACCURACY

UP TO

80

USERS



ELECTRONIC METER INTEGRATED



SELF SERVICE MC

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
COLUMN VERSIONS							
FO073801D	67	148	1478X488X400	-	1	6*	4
FO074101D	75	165	1478X488X400	!	!	6*	4
FO073806A	75	148	1478X488X400	-	1	6*	4
TANK VERSIONS							
FO0738B0D	57	126	1080X488X400	-	1	6*	4
FO0741B0D	65	143	1080X488X400	-	1	6*	4



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

E120 / PANTHER 72

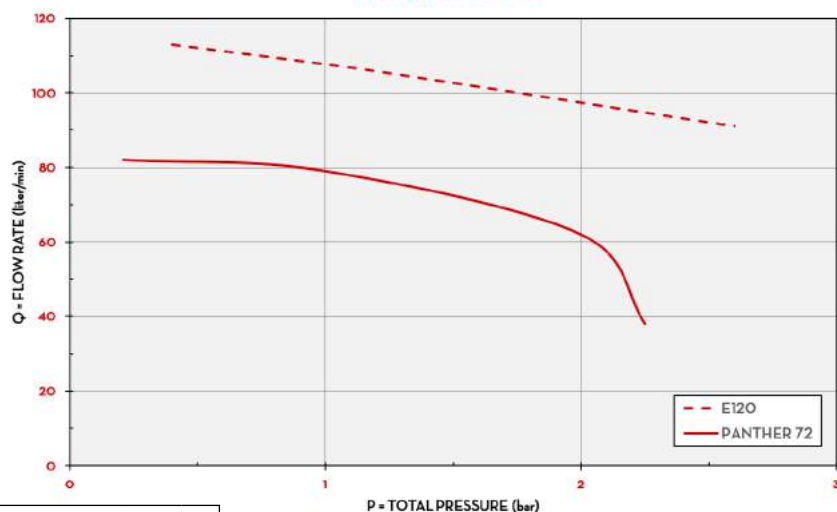

TYPE OF FLUID DIESEL

TEMPERATURE 13-20 °C

P - TOTAL PRESSURE (bar)

IN THE BOX

- SELF SERVICE MC UNIT
- DELIVERY HOSE
- AUTOMATIC NOZZLE
- INSTRUCTION MANUAL

DETAILS



TANK VERSION AVAILABLE



WATER CAPTOR FILTER (pag. 128)




DRIVER KEY (not included)



SSM 2018 (pag. 148)

DIMENSIONS

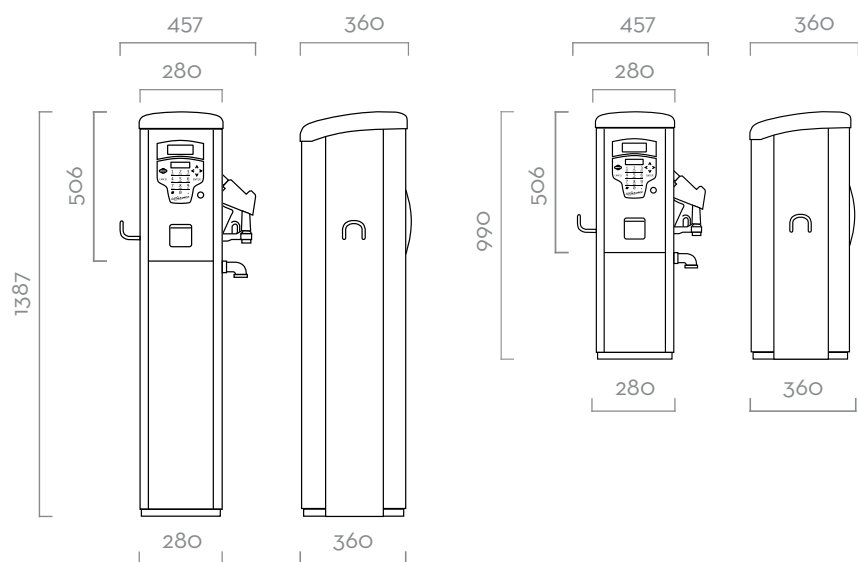

Dimensions expressed in millimeters

COMPONENTS

- **PUMPS:**
PANTHER 72 / E120 PAG. 64/68
- **METER:**
K600/3 PAG. 96
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 118
- **FILTER:**
WATER CAPTOR PAG. 128

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER		INLET	PC
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE	TYPE	H2O FILTER	FILTERING CAPACITY	BSP	CONNECTION
COLUMN VERSIONS														
FO073801D	SELF SERVICE 70 MC F	D	70	18	230/50	900	4,2	PANTH 72	K600	AUT.	YES	30μ	1" 1/2	YES
FO074101D	SELF SERVICE 100 MC F	D	90	24	230/50	1150	5,7	E 120	K600	AUT.	YES	30μ	1" 1/2	YES
FO073806A	SELF SERVICE 70 MC F PRINTER*	D	70	18	230/50	900	4,2	PANTH 72	K600	AUT.	YES	30μ	1" 1/2	YES
TANK VERSIONS														
FO0738B0D	SELF SERVICE 70 MC TANK	D	70	18	230/50	900	3,3	PANTH 72	K600	AUT.	NO	-	1" 1/2	YES
FO0741B0D	SELF SERVICE 100 MC TANK	D	90	24	230/50	1150	5,7	E 120	K600	AUT.	NO	-	1" 1/2	YES

*WITH 7M HOSE. UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY