

S DISPENSERS SELF SERVICE 70 FM

Technical Specifications		المواصفات الفنية	
Model	Self-service 70 FM	Self-service 70 FM	الموديل
Code	F0073900B	F0073900B	الكود
Meter Model	K600	K600	موديل العداد
Pump Model	Panth 72	Panth 72	موديل الضمبة
Voltage	230 V - 50 Hz	٢٣٠ فولت - ٥٠ هرتز	تيار التشغيل
Inlet	1,5"	١,٥ بوصة	قطر الدخول
Flow rate	70 l/min	٧٠ لتر / دقيقة	معدل التصريف
Power Watt	1150 W	١١٥٠ وات	قدرة الموتور
Weight	75 kg	٧٥ كجم	الوزن
Dimensions	1478 x 488 x 400 mm	١٤٧٨ × ٤٨٨ × ٤٠٠ مم	الأبعاد
Accessories		المستلزمات	
- Automatic gun - water and impurities separator filter. - Delivery hose 6m - Mobile connection (Swivel). - Key to lock - metal hose holder.		- مسدس اتوماتيك - فلتر فاصل مياه وشوائب. - خرطوم ٦ متر - وصلة متحركة (سويفل). - مفتاح للقفل - حامل خرطوم معدني.	
Other Specifications		مواصفات أخرى	
- Digital screen for reading accuracy with a metal cover for protection. - Control panel with all types of pressure keys required. - Control the machine with a password. - Store operations. - The ability to transfer data on a computer. - It is equipped with a filter to purify the diesel from water and a filter for impurities on the entry of the pump. - Equipped with a printer for the current reading printer - withdrawn quantity - user name - date of use. - A product level measuring device inside a tank by setting the liquid level / percentage / number of liters in addition to (2) alarms to determine the maximum drop and height of the liquid inside the tank. - The possibility of connecting the machine directly to a computer and full control of the machine for a distance of up to (1) kilometers (on request and at an additional cost). - The ability to add a magnetic key to each user (by request and at an additional cost)		- شاشة ديجيتال لدقة القراءة ذات غطاء معدني للحماية. - لوحة تحكم بكل انواع المفاتيح الضغط المطلوبة. - تحكم بالماكينة بكود تشغيل (باسورد). - تخزين عمليات الصرف. - إمكانية نقل البيانات على جهاز الكمبيوتر. - مزود بفلتر لتنقية السولار من المياه وفلتر مصفى للشوائب على دخول الضمبة. - مزودة بطابعة لطابعة القراءة الحالية - الكمية المسحوبة - اسم المستخدم - تاريخ الاستخدام. - جهاز قياس مستوى المنتج داخل خزان عن طريق تحديد مستوى السائل / النسبة المئوية / عدد اللترات بالإضافة الى (٢) انذار لتحديد اقصى انخفاض وارتفاع للسائل داخل التانك. - امكانية توصيل الماكينة مباشرة بجهاز كمبيوتر والتحكم الكامل بالماكينة لمسافة تصل الى (١) كيلو متر (بالطلب بتكلفة اضافية). - إمكانية إضافة مفتاح مغنط لكل مستخدم (بالطلب بتكلفة اضافية).	





DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

SELF SERVICE FM

FEATURES

- TICKET PRINTER
- MULTI-USER MANAGEMENT
- WATER CAPTOR FILTER
- TANK LEVEL INDICATOR
- STURDY STRUCTURE
- COMPATIBLE WITH SSM 2018 SOFTWARE
- IP55

The PIUSI SELF SERVICE FM is a dispenser for diesel with integrated OCIO tank level indicator. It is equipped with a high-capacity vane pump, built-in bypass, automatic nozzle, water captor filter and electronic panel able to manage up to 120 users and 255 transactions. It is compatible with SSM2018 software.

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

PERFORMANCE

UP TO

90 L/MIN

FLOW-RATE

AC

CONTINUOUS DUTY

POWER

± 0,5%

ACCURACY

UP TO

120

USERS



INTEGRATED TICKET PRINTER



SELF SERVICE FM

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
FO0739OOC	67	148	1478X488X400	1	1	6*	4
FO0742OOC	75	165	1478X488X400	-	1	6*	4
FO0739BOC	57	126	1080X488X400	-	1	6*	4
FO0742BOC	65	143	1080X488X400	-	1	6*	4



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART


E120 / PANTHER 72

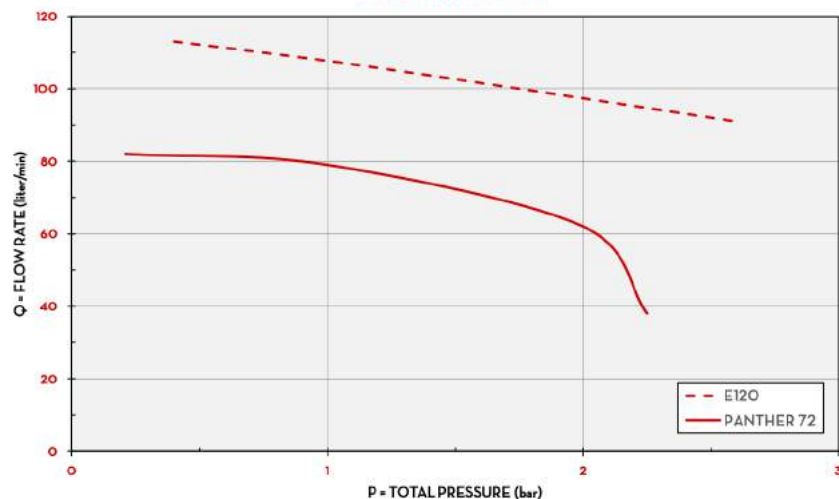

TYPE OF FLUID DIESEL

TEMPERATURE 13-20 °C

DIMENSIONS

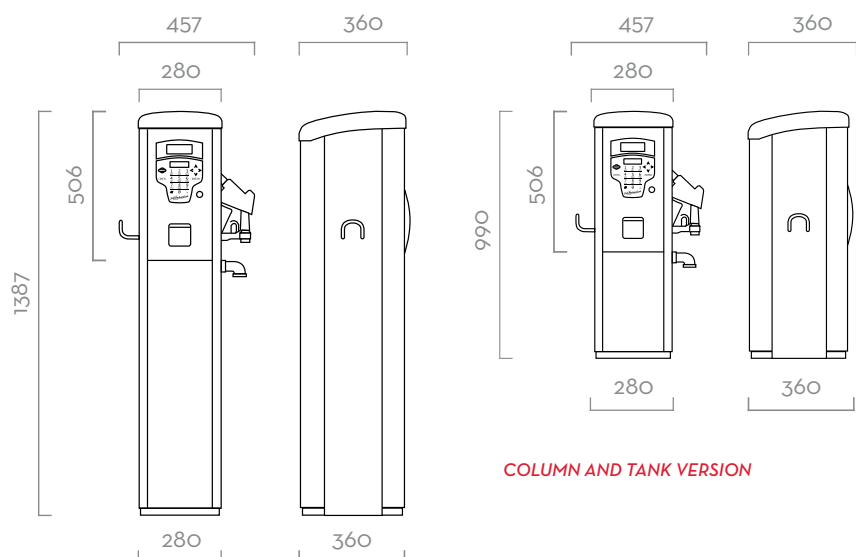

COLUMN AND TANK VERSION

Dimensions expressed in millimeters

IN THE BOX

- SELF SERVICE FM UNIT
- DELIVERY HOSE
- AUTOMATIC NOZZLE
- INSTRUCTION MANUAL

DETAILS



TANK VERSION AVAILABLE



WATER CAPTOR FILTER (pag. 128)



DRIVER KEY (not included)



SSM 2018 (pag. 148)

MATERIALS

- **PUMPS:**
E80 / E120 PAG. 68
- **METER:**
K600/3 PAG. 96
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 118
- **FILTER:**
WATER CAPTOR PAG. 128

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER		INLET	PC
			L/MIN	GPM	AC V/Hz	DC VOLT	POWER WATT	AMP. MAX.			H2O FILTER	FILTERING CAPACITY	BSP	CONNECTION
FO07390OC	SELF SERVICE 70 FM	D	70	18	230/50	550	3,3	PANTH 72	K600	AUT.	YES	30μ	1" 1/2	YES
FO07420OC	SELF SERVICE 100 FM	D	90	24	230/50	1150	5,7	E 120	K600	AUT.	YES	30μ	1" 1/2	YES
FO07398OC	SELF SERVICE 70 FM TANK	D	70	18	230/50	550	3,3	PANTH 72	K600	AUT.	NO	-	1" 1/2	YES
FO07428OC	SELF SERVICE 100 FM TANK	D	90	24	230/50	1150	5,7	E 120	K600	AUT.	NO	-	1" 1/2	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY

SELF SERVICE FM