

C DISPENSERS Cube 70 MC



Technical Specifications

Model	Cube 70 MC
Code	F0059400D
Meter Model	K600
Pump Model	Panth 72
Voltage	230 V - 50 Hz
Inlet	1"
Flow rate	70 l/min
Power Watt	900 W
Weight	25 kg
Dimensions	400 x 400 x 460 mm

Accessories

- Gun Type: Automatic.

Other Specifications

- Digital screen for reading accuracy.
- Control the machine with a password.
- Store operations.
- The ability to transfer data on a computer.
- Ability to add (Option) a password control key.

المواصفات الفنية

Cube 70 MC	الموديل
F0059400D	الكود
K600	موديل العداد
Panth 72	موديل الطلمبة
٢٣ فولت - ٥٠ هرتز	تيار التشغيل
١ بوصة	قطر الدخول
٠.١ لتر / دقيقة	معدل التصريف
٩٠٠ وات	قدرة الموتور
٢٥ كجم	الوزن
٤٠٠ × ٤٠٠ × ٤٦٠ مم	الأبعاد

المستملات

- نوع المسدس: أوتوماتيك.

مواصفات أخرى

- شاشة ديجيتال لدقة القراءة.
- تحكم بالماكينة بكود تشغيل (باسوورد).
- تخزين عمليات الصرف.
- إمكانية نقل البيانات على جهاز الكمبيوتر.
- إمكانية إضافة (أوبشن) مفتاح تحكم بالباسوورد.



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

CUBE MC

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- MULTI-USER MANAGEMENT
- ALL-IN-ONE EQUIPMENT
- COMPACT DESIGN
- COMPATIBLE WITH SSM 2018 SOFTWARE
- SUCTION FILTER
- IP55

The PIUSI CUBE MC is the upgraded version of the world famous Cube dispenser equipped with an electronic panel able to manage up to 120 users and 255 transactions. The sturdy structure includes a self-priming vane pump, built-in bypass, automatic nozzle, and integrated nozzle holder with start/stop pump lever.

PERFORMANCE

UP TO
70 L/MIN

FLOW-RATE

AC/DC

VOLTAGE
POWER

± 0,5%

ACCURACY

UP TO
120

USERS



CUBE 70 MC



CUBE 70 MC WITH PEDESTAL (optional)

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
FO059400D	25	55	400X400X460	!	!	12	24
FO059413C	25	55	400X400X460	-	1	12	24
FO059414C	25	55	400X400X460	-	1	12	24
FO059415C	25	55	400X400X460	-	1	12	24
FO059422A	25	55	400X400X460	-	1	12	24



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

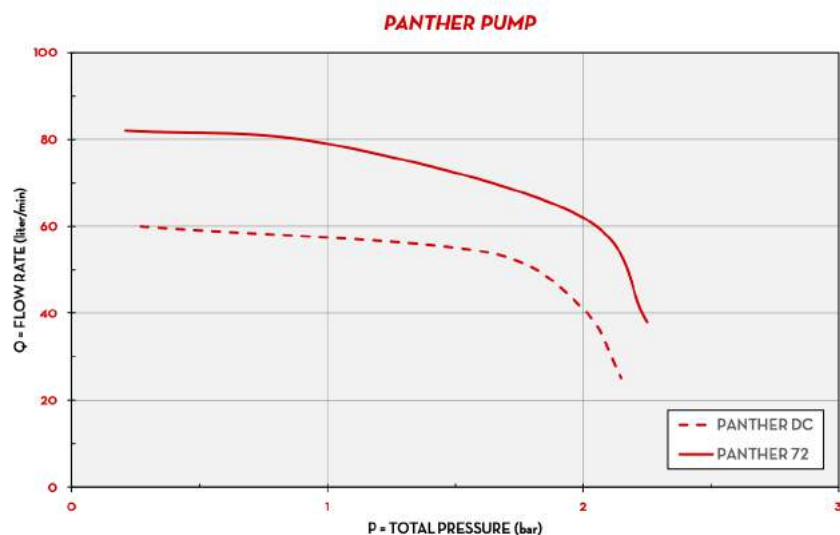

TYPE OF FLUID DIESEL

TEMPERATURE 22-20 °C

IN THE BOX

- CUBE DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



SHUTTER



DRIVER KEY (not included)



DATA TRANSFER 2018 (pag. 150)




SSM 2018 (pag. 148)

MATERIALS

- **PUMPS:**
PANTHER AC PAG. 64
PANTHER DC PAG. 78
- **METER:**
K600/3 PAG. 96
- **NOZZLE:**
AUTOMATIC NOZZLE PAG. 118

DIMENSIONS

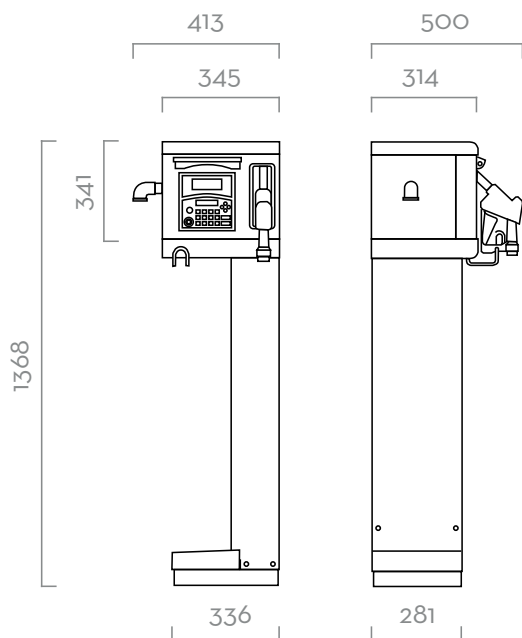

Dimensions expressed in millimeters

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER	INLET	HOSE		PC		USERS
			L/MIN	GPM	AC V/HZ	DC VOLT	POWER WATT	AMP. MAX.					LENGTH	Ø	CONNECTION	N°	
FO059400D	CUBE 70 MC	D	70	18	230/50	900	4,2	PANTH 72	K600	AUT.	NO	1"	4M	1"	YES	50	
FO059413C	CUBE 70 MC DC 12V	D	56	15	12	300	35	PANTH DC	K600	AUT.	NO	1"	4M	1"	YES	50	
FO059414C	CUBE 70 MC DC 24V	D	70	18	24	420	25	PANTH DC	K600	AUT.	NO	1"	4M	1"	YES	50	
FO059415C	CUBE 70 MC 120 UT	D	70	18	230/50	550	3,3	PANTH 72	K600	AUT.	NO	1"	4M	1"	YES	120	
FO059422A	CUBE 70 MC 12V 120 UT	D	56	15	12	300	35	PANTH DC	K600	A120	NO	1"	4M	1"	YES	120	

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY