

K MECHANICAL METERS 44

PERFORMANCE

20-120

L/MIN
FLOW-RATE

10 BAR

MAX OPERATING
PRESSURE

± 1%

ACCURACY



Technical Specifications

Model	K44
Code	000560000
Flow Rate	20 - 120 l/m
Pressure	10 bar
Weight	0,6 kg
Dimensions	180 x 180 x 170 mm

المواصفات الفنية

K44	الموديل
000560000	الكود
٢. - ١٢. لتر / الدقيقة	التصريف
١. بار	الضغط
٠,٦ كجم	الوزن
١٧. x ١٨. x ١٩. مم	الأبعاد



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

K33 / K44

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- READY TO USE
- BURSTING PRESSURE 30 BAR
- NO BATTERY NEEDED
- EASY TO INSTALL AND CALIBRATE
- 4 FLOW DIRECTION

The PIUSI K33 and K44 are the bestseller mechanical meters in this market. Reliable, easy to install and to calibrate, they are equipped with a nutating disk that allows them to be installed in all four flow directions. The display is available in both three or four digits, according to the model chosen.

PERFORMANCE

20-120

L/MIN

FLOW-RATE

10 BAR

MAX OPERATING

PRESSURE

± 1%

ACCURACY



K33

K44

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
METERS							
000550000	0,6	1,3	18OX18OX170	-	1	192	240
000551000	0,6	1,3	18OX18OX170	-	1	192	240
000552000	0,6	1,3	18OX18OX170	-	1	192	240
000553000	0,6	1,3	18OX18OX170	-	1	192	240
000560000	0,6	1,3	18OX18OX170	1	1	192	240
000561000	0,6	1,3	18OX18OX170	-	1	192	240
000562000	0,6	1,3	18OX18OX170	-	1	192	240
000563000	0,6	1,3	18OX18OX170	-	1	192	240
PULSER							
00056500A	0,6	1,3	18OX18OX170	-	1	192	240



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



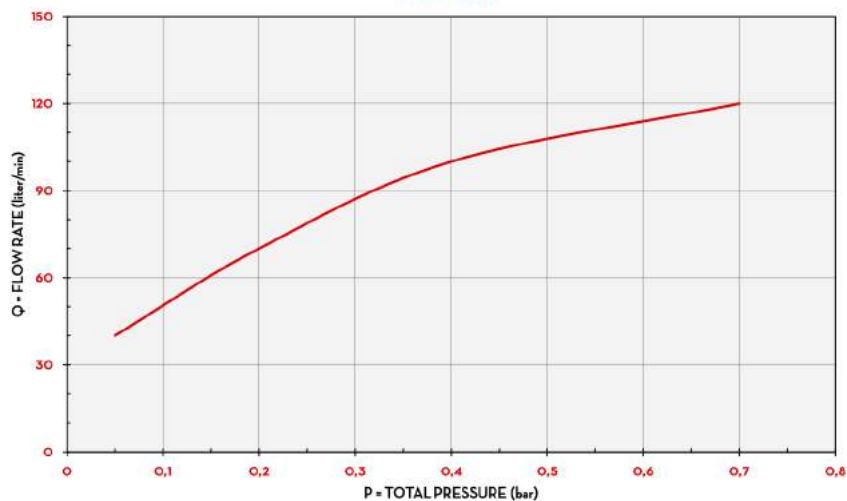
OIL



WATER



WINDSCREEN

CHART
K33 - K44


TYPE OF FLUID DIESEL

TEMPERATURE 16 °C

IN THE BOX

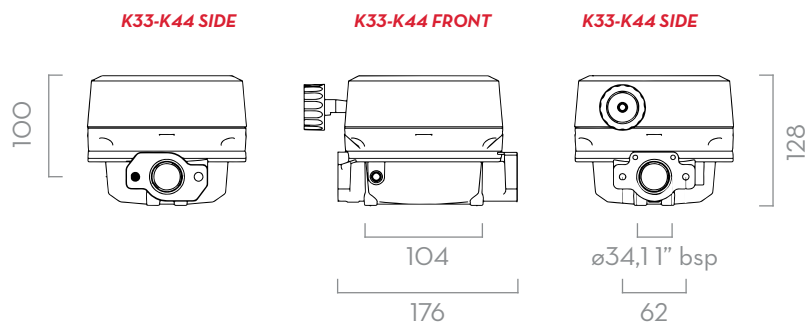
- K33 - K44 METER
- INSTRUCTION MANUAL

DETAILS


NUTATING DISK SYSTEM



4 FLOW DIRECTIONS

DIMENSIONS


Dimensions expressed in millimeters

MATERIALS

- BODY: ALUMINIUM
- NUTATING DISK CHAMBER: TECHNOPYLIMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW DIRECTION	FLOW-RATE		PRESSURE		PULSER	INLET / OUTLET
				L/MIN	GPM	BAR	PSI	P/L (P/GAL)	
METERS									
000550000	K33 VER. A	D	←	20 - 120	5 - 32	10	142	-	1" BSP
000551000	K33 VER. B	D	↑	20 - 120	5 - 32	10	142	-	1" BSP
000552000	K33 VER. C	D	↓	20 - 120	5 - 32	10	142	-	1" BSP
000553000	K33 VER. D	D	→	20 - 120	5 - 32	10	142	-	1" BSP
000560000	K44 VER. A	D	←	20 - 120	5 - 32	10	142	-	1" BSP
000561000	K44 VER. B	D	↑	20 - 120	5 - 32	10	142	-	1" BSP
000562000	K44 VER. C	D	↓	20 - 120	5 - 32	10	142	-	1" BSP
000563000	K44 VER. D	D	→	20 - 120	5 - 32	10	142	-	1" BSP
PULSER									
00056500A	K44 PULSER	D	→	20 - 120	5 - 32	10	142	10 (38)	1" BSP

K33 / K44