

K200

ELECTRONIC METERS

FEATURES

- LOW FLOW RATE OPERATION
- CONSUMPTION MONITORING
- SMALL SIZE
- INLET FILTER
- DOSAGE SYSTEM
- HIGH PRESSURE RESISTANCE
- CALIBRATION FUNCTION
- COMPACT DESIGN

PERFORMANCE

up to
2,8 L/MIN
(up to 0,66 gpm)
FLOW RATE

± 0,5 %
ACCURACY

0,2%
REPEATABILITY

less than
0,5 AR
LOSS OF PRESSURE



DETAILS



RESET / CALIBRATE BUTTON



5 DIGIT DISPLAY



OVAL GEAR



2 AAA BATTERIES INCLUDED

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER



Technical Specifications

Model	K200
Code	F0043012A
Flow Rate	0,1 - 2,5 l/m
Pressure	500 bar
Inlet / Outlet	1/8"
Weight	0,6 kg
Dimension	130 x 65 x 108 mm

المواصفات الفنية

K200	الموديل
F0043012A	الكود
٠,١ - ٢,٥ لتر / الدقيقة يبدأ العد من ١ مللي لتر	التصريف
٥٠٠ بار	الضغط
١/٨ بوصة	قطر الدخول والخروج
٠,٦ كجم	الوزن
١٣٠ × ٦٥ × ١٠٨ مم	الأبعاد



KIT LUBE



DISPENSERS



PUMPS



METERS



NOZZLE METERS



NOZZLES

K200

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- LOW FLOW RATE OPERATION
- CONSUMPTION MONITORING
- SMALL SIZE
- INLET FILTER
- DOSAGE SYSTEM
- HIGH PRESSURE RESISTANCE
- CALIBRATION FUNCTION
- COMPACT DESIGN

The Piusi K200 meter is an oval gear meter suitable for measuring diesel, oil and grease. Its low flow rate count makes it also applicable to measure the fuel consumption in a system.

PERFORMANCE

up to

2,8 L/MIN

(up to 0,66 gpm)

FLOW RATE

± 0,5 %

ACCURACY

0,2%

REPEATABILITY

less than

0,5 AR

LOSS OF PRESSURE

**K200 METER****K200 PULSER****K200 HP PULSER**

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
METERS						
FOO43012A	0,6	1,3	130X65X108	5,1X2,6X4,3		1
FOO43011A	0,5	1,1	130X65X108	5,1X2,6X4,3		1
PULSER						
OOO45203O	0,6	1,3	130X65X108	5,1X2,6X4,3		1
OOO45200O	0,5	1,1	130X65X108	5,1X2,6X4,3		1

WASTE OIL
EQUIPMENTS

FILTRATION

FLUID
MONITORING

HOSE REELS



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER





WINDSCREEN


CHARTS

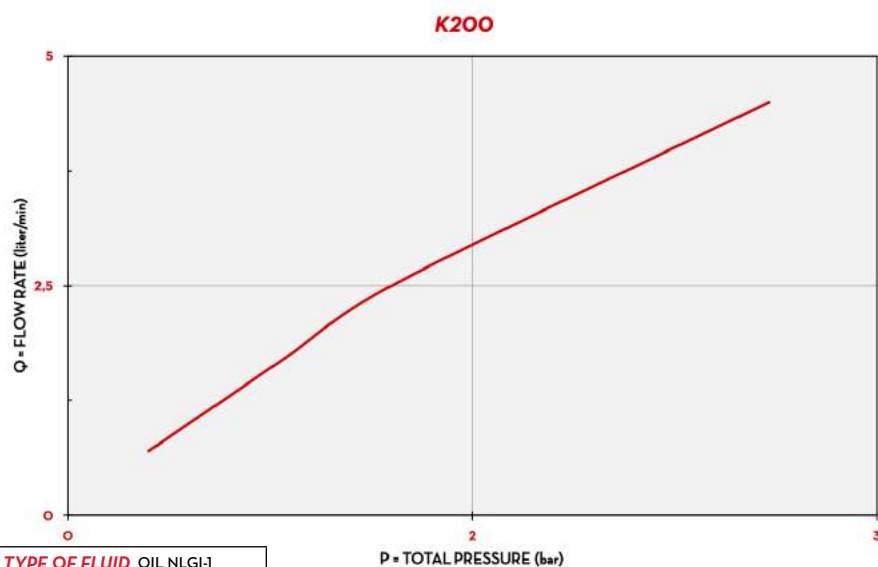

DIMENSIONS

K200 FRONT
K200 HP pulser FRONTK200 SIDE
K200 HP pulser BOTTOM

K200 pulser SIDE



K200 pulser BOTTOM



Measures expressed in millimeters

IN THE BOX

- K200 METER
- INSTRUCTION MANUAL

DETAILS



RESET / CALIBRATE BUTTON



5 DIGIT DISPLAY



OVAL GEAR



2 AAA BATTERIES INCLUDED

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		WORKING PRESSURE		BATTERIES INCLUDED	INLET OUTLET
			KG/MIN	LB/MIN	BAR	PSI	AAA NO.2 2 X 1,5 V	
METERS								
FOO43012A	K200 ML/L	  	0,1 - 2,5	0,2 - 5,5	500	7200	YES	1/8" BSP
FOO43011A	K200 GR/KG	  	0,1 - 2,5	0,2 - 5,5	550	7200	YES	1/8" BSP
FOO430230	K200/2	  	0,2 - 5	0,4 - 11	700	10000	YES	1/4" BSP
PULSER								
OOO452030	K200 HP PULSER	  	0,1 - 2,5	0,2 - 5,5	1000	14500	NO	1/8" BSP
OOO452000	K200 PULSER	  	0,1 - 2,5	0,2 - 5,5	30	426	NO	1/4" BSP
FOO452060	K200/2 PULSER	  	0,2 - 5	0,4 - 1,1	700	10000	NO	1/4" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K200