

Technical	Specifications	المواصفيات الفنيسية				
Model	ST 200 AC	ST 200 AC	الموديل			
Code	F00315000	F00315000	الكود			
Flow-Rate	200 l/m	۲۰۰ لتر / دقيقة	معدل التصريف			
AC Volt / Hz	230 V - 50 Hz	۲۳۰ فولت – ۵۰ هرتز	تيار التشغيل			
Pressure	2,5 bar	۲,۵ با ر	الضغط			
Inlet / Outlet	1,5"	۱,۵ بوصة	قطر الدخول والخروج			
Power Watt	2050 W	۲۰۵۰ وات	القدرة			
Pump model	E 120	E 120	موديل الطلمبة			
Weight	46 kg	٤٦ کجمر	الوزن			
Dimension	587 x395 x420 mm	۵۸۷ × ۳۹۵ × ۲۰۶ ممر	الأبعاد			



ST 200 AC

FEATURES

- STURDY METALLIC FRAME
- READY TO USE
- EASY TO MOVE
- HEAVY DUTY

The PIUSI ST 200 AC is a dispenser that allows high flow refueling thanks to the two integrated E120 self-priming rotary electric vane pumps. Fitted with bypass valve and elevated reliability seal, the dispenser works even at low working temperatures and in every condition on worksites. The oval gear mechanical flow meter guarantees great precision (available on request). It is also available with wheels and handle (on request) for easier handling.






ST 200 AC





HANDY KIT: VERSION WITH WHEELS AND HANDLE

PACKAGING									
	WE	IGHT	PACKAGING						
CODE	KG	LBS	ММ	INCH	PCS/BOX				
F00315000	<mark>46</mark>	101	587X395X42O	23,1X15,6X16,5	1				
F16860000	-	-	-	-	-				

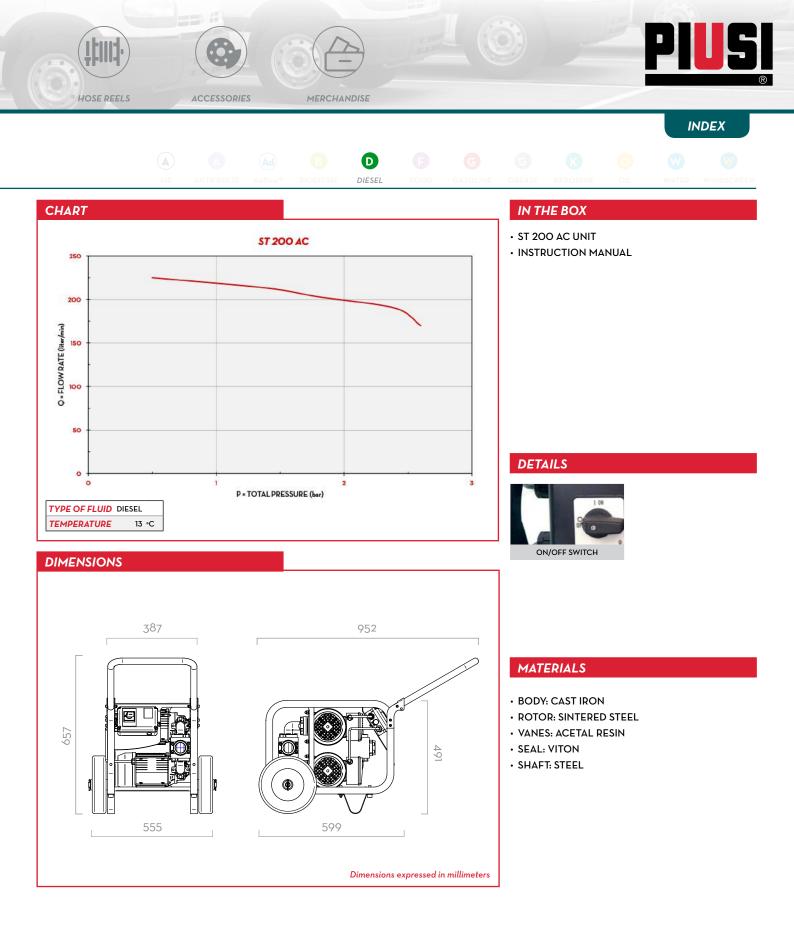

TECHNICAL DATA											
CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE		PUMP		MAX PRESSURE	INLET	
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	N°	BAR	BSP
F00315000	ST 200 BASIC	D	200	52,7	230/50	2050	10	E 120	2	<mark>2,5</mark>	<mark>1" 1/2</mark>
F16860000	HANDY KIT (HANDLE + WHEELS)	D	-	-	-	-	-	-	-	-	-

--

49

ST