

S MANUAL NOZZLE elf 3000



FEATURES

- MANUAL
- VERSATILE
- HIGH EFFICIENCY
- LEVER PROTECTION



DETAILS



LEVER PROTECTION



ROTATING SWIVEL

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON



Technical Specifications

المواصفات الفنية

Model	self 3000	self 3000	الموديل
Code	F0065000A	F0065000A	الكود
Flow-rate	150 l/m	١٥٠ لتر / د	التحريف
Inlet	1"	١ بوصة	قطر الدخول
Weight	0.7 kg	٠,٧ كجم	الوزن
Dimension	400 x 250 x 200 mm	٢٠٠ × ٢٥٠ × ٤٠٠ مم	الأبعاد



DISPENSERS



PUMPS



METERS



NOZZLES



FILTRATION

FLUID
MONITORING

SELF 2000 / SELF 3000

FEATURES

- MANUAL
- VERSATILE
- HIGH EFFICIENCY
- LEVER PROTECTION

The PIUSI SELF 2000 / SELF 3000 manual nozzles perform the maximum efficiency thanks to the low-flow resistance and the wide range of applications including transfer systems run by gravity. They are supplied with removable lever protection and connectors.

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

PERFORMANCE

UP TO
150 L/MIN

FLOW-RATE

25MM
OD SPOUT

SELF 2000 / SELF 3000



SELF 2000 DIESEL



SELF 3000 DIESEL/GASOLINE



PLASTIC NOZZLE WATER/DIESEL



PLASTIC NOZZLE WATER/FOOD



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
00063900A	0,7	1,5	400X250X200	16X11X7,8	1		
00064900A	0,7	1,5	400X250X200	16X11X7,8	1		
00064902A	0,7	1,5	400X250X200	16X11X7,8	1		
00065001A	0,7	1,5	400X250X200	16X11X7,8	1		
00065600A	0,7	1,5	400X250X200	16X11X7,8	1		
FO0641120	0,7	1,5	400X250X200	16X11X7,8	1		
FO0641130	0,7	1,5	400X250X200	16X11X7,8	1		
FO065000A	0,7	1,5	400X250X200	16X11X7,8	1		
FO0650020	0,7	1,5	400X250X200	16X11X7,8	1		
FO063000A	0,3	0,7	-	-	1		



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

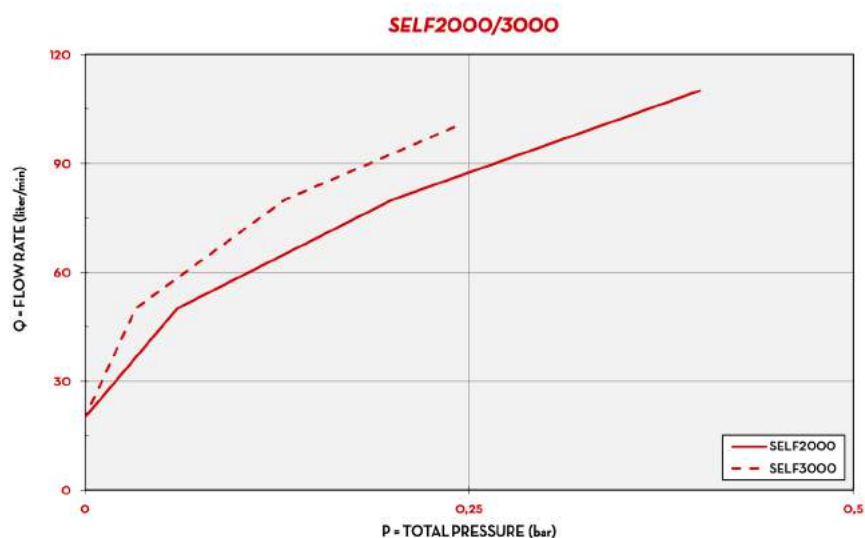

TYPE OF FLUID DIESEL
TEMPERATURE 18 °C

IN THE BOX

- SELF 2000/ SELF 3000 NOZZLE
- INSTRUCTION MANUAL

DETAILS




LEVER PROTECTION



ROTATING SWIVEL

DIMENSIONS

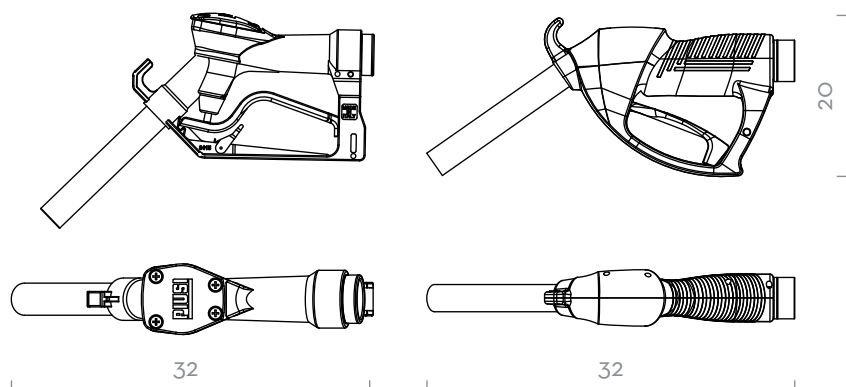

Dimensions expressed in millimeters

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		INLET		SPOUT
			L/MIN	GPM	SWIVEL	Ø BSP	EXT. Ø MM
00063900A	SELF2000 1" BSP - UNLEADED SPOUT	B D G O	120	32	FEMALE	1" BSP	20
00064900A	SELF 2000 - 3/4 BSP	B D O	120	32	FEMALE	3/4" BSP	25
00064902A	SELF 2000 - 3/4 BSP - UNLEADED SPOUT	B D G O	120	32	FEMALE	3/4" BSP	20
00065001A	SELF 3000 1 UNLEADED SPOUTSELF 2000 1"	B D O	150	40	FEMALE	1" BSP	20
00065600A	SELF 2000 1"	B D O	120	32	FEMALE	1" BSP	25
FO0641120	SELF 2000 WITH HOSE TAIL	B D O	120	32	FEMALE	3/4" BSP	25
FO0641130	SELF 2000 1	B D O	120	32	FEMALE	1" BSP	25
FO065000A	SELF 3000 1	B D O	150	40	FEMALE	1" BSP	25
FO0650020	SELF 3000 1 UNLEADED SPOUT	B D G O W	150	40	FEMALE	1" BSP	20
FO063000A	PLASTIC NOZZLE-S 1" BLACK	B D O W	80	21	FEMALE	1" BSP	34

SELF 2000 / SELF 3000