

A AUTOMATIC NOZZLE 280



FEATURES

- AUTOMATIC
- READY TO USE
- HEAVY DUTY CONDITIONS
- STURDY STRUCTURE

PERFORMANCE

UP TO
280 L/MIN

FLOW-RATE

1 1/2" BSP

INLET

38,5MM

OD SPOUT

A280



DETAILS



AUTOMATIC STOP



F1" SWIVEL

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

Technical Specifications

Model	A280
Code	F13249000
Flow-rate	280 l/m
Inlet	1.5"
Weight	3.30 kg

المواصفات الفنية

الموديل	A280
الكود	F13249000
التصريف	٢٨٠ لتر / د
قطر الدخول	١,٥ بوصة
الوزن	٣,٣٠ كجم



DISPENSERS



PUMPS



METERS



NOZZLES



FILTRATION

FLUID
MONITORING

A280

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- AUTOMATIC
- READY TO USE
- HEAVY DUTY CONDITIONS
- STURDY STRUCTURE

The PIUSI A280 is the biggest nozzle among the Piusi range of automatic fuel nozzles with its flow rate up to 280 l/min and spout OD 38,5 mm. Fully automatic thanks to the structural device that stops dispensing when the tank is full; it comes with a built-in swivel to guarantee maximum versatility.

PERFORMANCE

UP TO

280 L/MIN

FLOW-RATE

1 1/2" BSP

INLET

38,5MM

OD SPOUT

A280



A280



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
F13249000	5,30	7,28	⌈	⌈	⌈	⌈	⌈



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

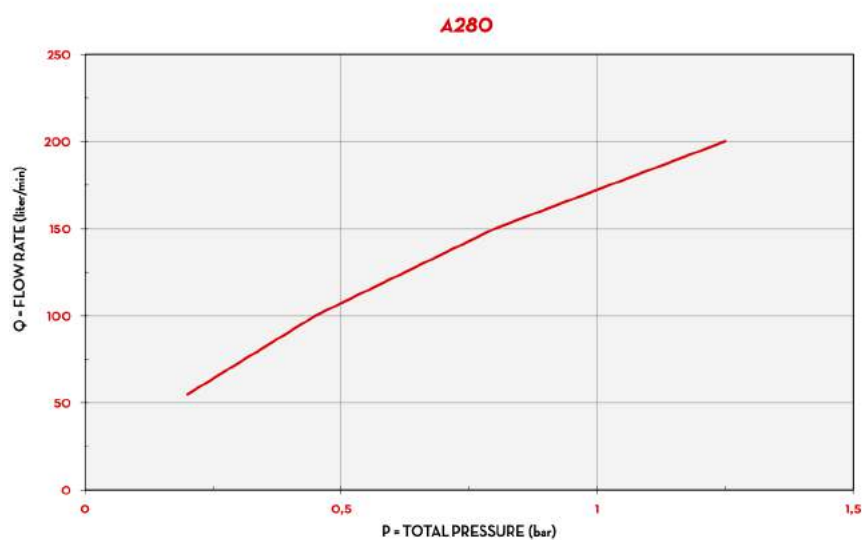

TYPE OF FLUID DIESEL

TEMPERATURE 10 °C

IN THE BOX

- A280 NOZZLE
- INSTRUCTION MANUAL

DETAILS




AUTOMATIC STOP



F 1" SWIVEL

DIMENSIONS

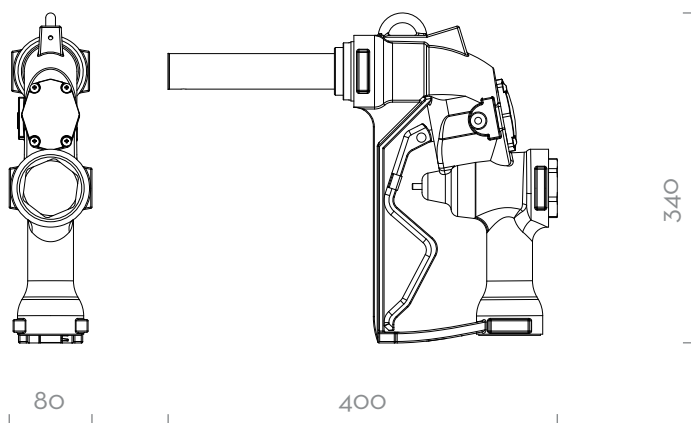

Dimensions expressed in millimeters

MATERIALS

- BODY: ALUMINIUM
- SEAL: VITON

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		INLET		SPOUT
			L/MIN	GPM	WITHOUT SWIVEL BSP	WITH SWIVEL BSP	EXT. Ø MM
F13249000 WITH SWIVEL	A280	D	280	74	1	1 1/2"	38,5

A280