

O TANK LEVEL INDICATORS CIO



PERFORMANCE

UP TO

4MT

HEIGHT

TANK

1%

FULL SCALE

ACCURACY

UP TO

50 MT

LENGTH

PROBE TUBE

UP TO

30 CST

VISCOSITY

FUNCTIONING

Fuel level
10mm
Measured
resolution

Fuel volume
20 litres
Calculated
resolution

Fuel %
7%
Calculated
resolution

LEVEL 400 mm

20 L

70 %

Power AC

Alarm

Pc
Communication
kit

Length up to 50 m



Technical Specifications

Model	OCIO
Code	F0075510D
Voltage	220 V - 50 Hz
Tube length	10 m
Weight	2,2 kg
Dimension	300 x 410 x 100 mm

المواصفات الفنية

الموديل	OCIO
الكود	F0075510D
تيار التشغيل	٢٢٠ فولت - ٥٠ هرتز
طول الخرطوم	١٠ متر
الوزن	٢,٢ كجم
الأبعاد	٣٠٠ × ٤١٠ × ١٠٠ مم

Other Specifications

- The device to measure the product level inside the tank with three different measurements in percentage / number of liters / milliliters.
- There are two alarms that are set according to the user's need in case the liquid is higher than the specified percentage or if it is low, and this can be linked to an alarm or buzzer.
- The device can also be linked to the computer via an additional device (at an additional cost) in order to monitor the tank moment by moment from the computer with a simple software and give periodic reports.

مواصفات أخرى

- الجهاز لقياس مستوى المنتج داخل التانك بثلاثة قياسات مختلفة بالنسبة المئوية / عدد اللترات / المللي متر.
- يوجد اثنين من جهاز الإنذار يتم ضبطهم حسب حاجة المستخدم في حالة ارتفاع السائل عن النسبة المحددة أو في حالة انخفاضه ويمكن ربط ذلك بكشاف انذار أو منبه.
- كما يمكن ربط الجهاز بالكمبيوتر عن طريق جهاز إضافي (بتكلفة إضافية) وذلك لمتابعة التانك لحظة بلحظة من جهاز الكمبيوتر بسوفت وير بسيط ويعطي تقارير دورية.



DISPENSERS



PUMPS



METERS



NOZZLE



FILTRATION

FLUID
MONITORING

OCIO

هذا الكتالوج خاص بالشركة المصدرة وليست جميع
الأكواد المذكورة فيه صالحة للسوق المصري

FEATURES

- LOW/HIGH LEVEL ALARMS
- FLUID MEASURES INDICATION
- BUILT-IN DISPLAY

OCIO is Piusi's tank level indicator suitable for any kind of fluid storage in tanks up to a 4 mt depth. It gives a real time indication of the fluid quantity inside the tank. It is easy to calibrate and has two alarms that can be adjusted at a specific high and low level for high and low levels.

PERFORMANCE

UP TO

4MT

HEIGHT

TANK

1%

FULL SCALE

ACCURACY

UP TO

50 MT

LENGTH

PROBE TUBE

UP TO

30 CST

VISCOSITY



OCIO



10 METERS HOSE



BRASS PROBE

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO075510D	2,2	4,8	300X410X100	11,8X16,1X3,9	1
FO0755160	2,2	4,8	300X410X100	11,8X16,1X3,9	1



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

FUNCTIONING

Fuel level
10mm
Measured
resolution



Fuel volume
20 litres
Calculated
resolution



Fuel %
1%
Calculated
resolution



Power AC

Length up to 50 m

Alarm

Pc
Communication
kit


IN THE BOX

- OCIO UNIT
- PROBE
- 10 MT TUBE
- INSTRUCTION MANUAL

DETAILS



DIMENSIONS

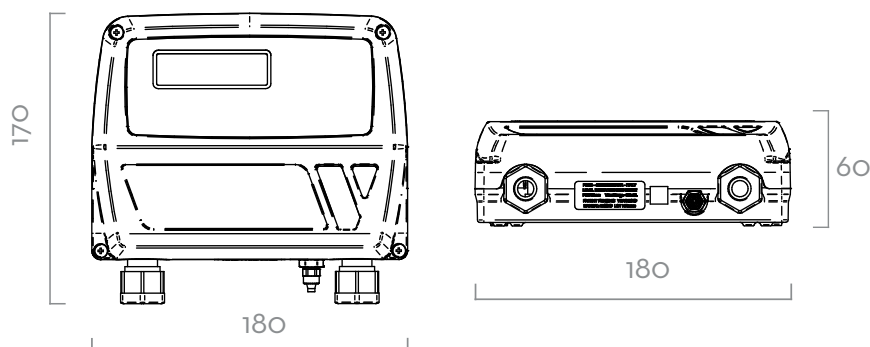

Dimensions expressed in millimeters

MATERIALS

- PROBE: BRASS
- TUBE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	VISCOSITY	VOLTAGE		RS EXIT
			cSt	AC V/Hz	POWER WATT	
FO075510D	LEVEL INDICATOR OCIO LV / RS OUTPUT	A B D O W W	UP TO 30	230/50	20	AVAILABLE
FO075516O	LEVEL INDICATOR OCIO LV / 4/20 mA OUTPUT	A B D O W W	UP TO 30	230/50	20	AVAILABLE