



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

# VISCO FLOWMAT

## FEATURES

- ON DEMAND FLOW
- ELECTRONIC PRESSURE SWITCH
- BUILT-IN SECURITY VALVE

## PERFORMANCE

up to  
**2000**  
cSt

VISCOSITY

up to  
**14 L/MIN**  
from 9-14 l/min

FLOW-RATE

up to  
**25 bar**  
from 12-25 bar


PRESSURE

below  
**70 dB**


NOISE LEVEL\*

## EN.

The Piusi VISCO-FLOWMAT is an electric gear pump suitable for transferring high viscosity oils. This self-priming pump is equipped with a pressure switch that features an automatic pump switch-off at the end of the delivery.

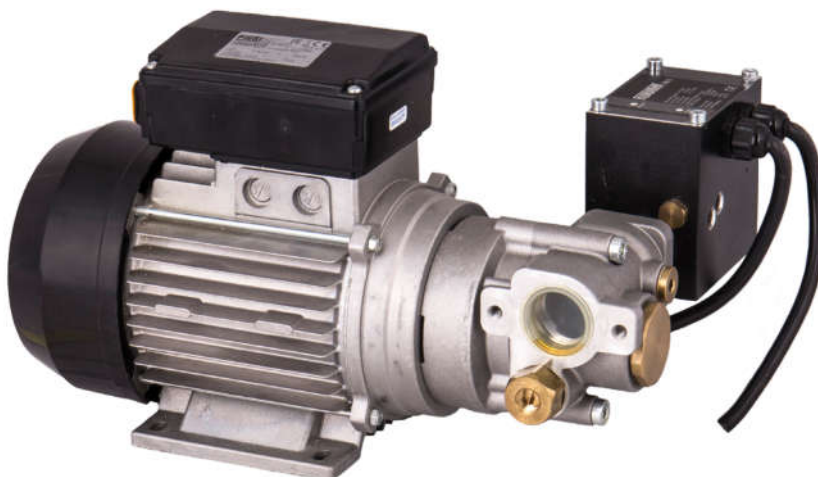

VISCO-FLOWMAT

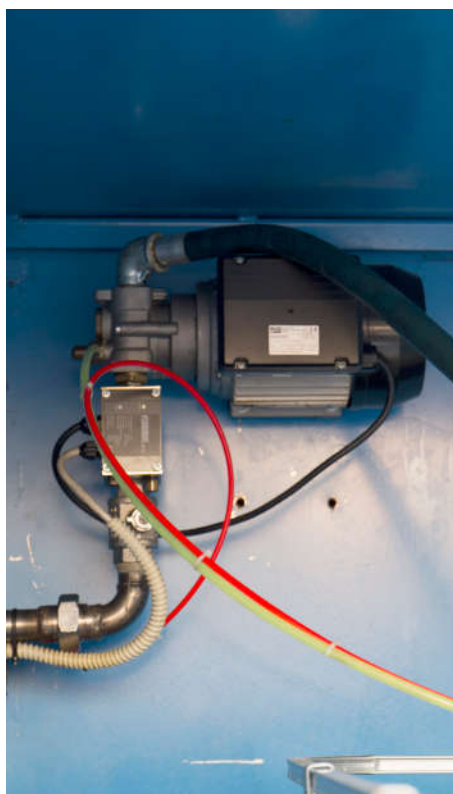

## PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO030200D	12	26,5	360X360X300	14,2X14,2X11,8		1
<b>FO030204D</b>	15	33,1	360X360X300	14,2X14,2X11,8		1
FO030206D	15	33,1	360X360X300	14,2X14,2X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

**PIUSI**



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

## CHARTS

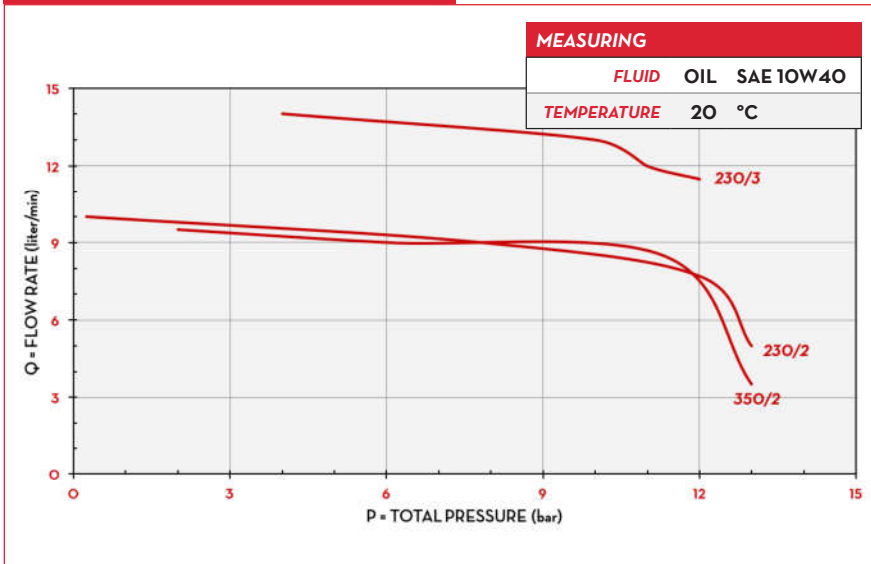

## IN THE BOX

- KIT PRIMING DEVICE
- KIT FLOWMAT
- VISCOMAT GEAR PUMP
- INSTRUCTION MANUAL

## DETAILS



ON / OFF SWITCH




ADJUSTABLE BYPASS VALVE



PRESSURE SWITCH

## DIMENSIONS

### VISCO FLOWMAT

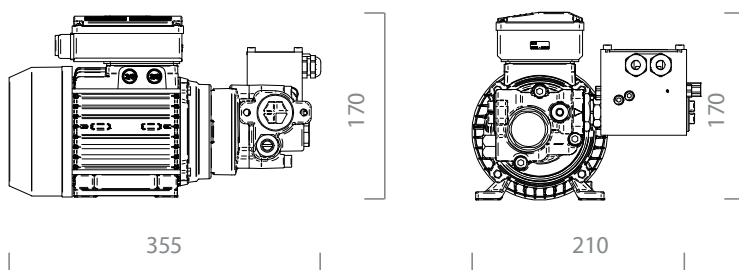

Measures expressed in millimeters

## MATERIALS

- BODY: CAST IRON
- GEARS: SINTERED STEEL
- SHAFT: STEEL
- BYPASS: BRASS

## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		AIR PRESSURE		VOLTAGE			RPM	INLET OUTLET	BYPASS VALVE
			L/MIN	GPM	BAR	PSI	MOTOR V./ HZ	POWER WATT	AMP. MAX.		BSP	
FO030200D	VISCO FLOWMAT 200/2		9	2,4	12	170	230/50/60	800	3,8	1450	1" BSP	YES
FO030204D	VISCO FLOWMAT 230/3		14	3,7	16	227	230/50	1200	6	1450	1" BSP	YES
FO030206D	VISCO FLOWMAT 350/2		9	2,4	25	355	230/50	1250	6	1450	1" BSP	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGE AND FREQUENCY

**VISCO FLOWMAT**

PUMPS

37